




WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

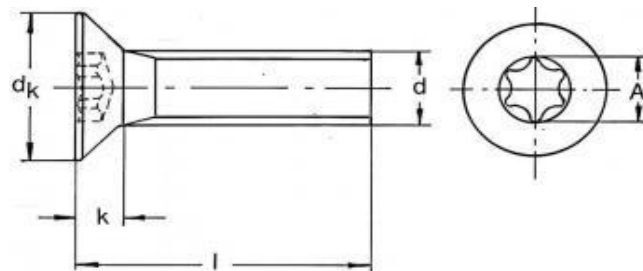

WAKTS2

SS 304

ISO 14581 CSK 6 Lobe

Parameter→ Size↓		M1.6x0.35*	M2x0.4	M2.5x0.45	M3x0.5	M4x0.7
Head Dia dk	Max	3.00	4.40	5.50	6.00	8.40
	Min	2.75	3.50	4.40	5.20	7.64
Head height	k Max	0.96	1.20	1.50	1.70	2.70
Drive Bit		T4	T6	T8	T10	T20
Length Tolerance		$\leq 3\text{mm} \pm 0.20$ / $4-6\text{mm} \pm 0.24$ / $7-10\text{mm} \pm 0.29$ / $11-16\text{mm} \pm 0.35$ $20-30\text{mm} \pm 0.42$ / $35-50\text{mm} \pm 0.50$ / $50-80\text{mm} \pm 0.65$ / $80-120\text{mm} \pm 0.75$				

Quote the item code given below with your order/ inquiries:

Dimensions in mm

Length↓Size→	M1.6x0.35*	M2x0.4	M2.5x0.45	M3x0.5	M4x0.7
2	WAKTS210602				
3	WAKTS210603	WAKTS202003	WAKTS220503		
4	WAKTS210604	WAKTS202004	WAKTS220504	WAKTS203004	
5	WAKTS210605	WAKTS202005	WAKTS220505	WAKTS203005	WAKTS204005
6	WAKTS210606	WAKTS202006	WAKTS220506	WAKTS203006	WAKTS204006
8	WAKTS210608	WAKTS202008	WAKTS220508	WAKTS203008	WAKTS204008
10	WAKTS210610	WAKTS202010	WAKTS220510	WAKTS203010	WAKTS204010
12	WAKTS210612	WAKTS202012	WAKTS220512	WAKTS203012	WAKTS204012
14	WAKTS210614	WAKTS202014	WAKTS220514	WAKTS203014	WAKTS204014
16	WAKTS210616	WAKTS202016	WAKTS220516	WAKTS203016	WAKTS204016
18	WAKTS210618	WAKTS202018	WAKTS220518	WAKTS203018	WAKTS204018
20	WAKTS210620	WAKTS202020	WAKTS220520	WAKTS203020	WAKTS204020
22			WAKTS220522	WAKTS203022	WAKTS204022
25			WAKTS220525	WAKTS203025	WAKTS204025
30			WAKTS220530	WAKTS203030	WAKTS204030
35				WAKTS203035	WAKTS204035
40				WAKTS203040	WAKTS204040
45				WAKTS203045	WAKTS204045
50				WAKTS203050	WAKTS204050
55				WAKTS203055	WAKTS204055
60				WAKTS203060	WAKTS204060
65					WAKTS204065
70					WAKTS204070
75					WAKTS204075
80					WAKTS204080
90					WAKTS204090
100					WAKTS204100

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.


Data is strictly informative.

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F

**WITRUS PRIVATE LIMITED**

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

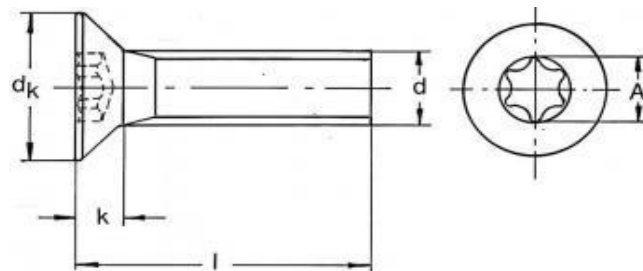**WAKTS2**

SS 304

ISO 14581 CSK 6 Lobe

Parameter→ Size↓		M5x0.8	M6x1.0	M8x1.25	M10x1.5
Head Dia dk	Max	10.00	12.00	16.00	20.00
	Min	8.94	10.87	15.37	17.78
Head height	k Max	2.80	3.30	4.65	5.50
Drive Bit		T25	T30	T45	T50
Length Tolerance		4-6mm ±0.24 / 7-10mm ±0.29 / 11-16mm ±0.35 / 20-30mm ±0.42 35-50mm ±0.50 / 50-80mm ±0.65 / 80-120mm ±0.75 / 120-180mm ±0.85			

Quote the item code given below with your order/ inquiries:

Dimensions in mm

Length↓ Size→	M5x0.8	M6x1.0	M8x1.25	M10x1.5
6	WAKTS205006			
8	WAKTS205008	WAKTS206008		
10	WAKTS205010	WAKTS206010	WAKTS208010	
12	WAKTS205012	WAKTS206012	WAKTS208012	
14	WAKTS205014	WAKTS206014	WAKTS208014	
16	WAKTS205016	WAKTS206016	WAKTS208016	WAKTS210016
18	WAKTS205018	WAKTS206018	WAKTS208018	WAKTS210018
20	WAKTS205020	WAKTS206020	WAKTS208020	WAKTS210020
22	WAKTS205022	WAKTS206022	WAKTS208022	WAKTS210022
25	WAKTS205025	WAKTS206025	WAKTS208025	WAKTS210025
30	WAKTS205030	WAKTS206030	WAKTS208030	WAKTS210030
35	WAKTS205035	WAKTS206035	WAKTS208035	WAKTS210035
40	WAKTS205040	WAKTS206040	WAKTS208040	WAKTS210040
45	WAKTS205045	WAKTS206045	WAKTS208045	WAKTS210045
50	WAKTS205050	WAKTS206050	WAKTS208050	WAKTS210050
55	WAKTS205055	WAKTS206055	WAKTS208055	WAKTS210055
60	WAKTS205060	WAKTS206060	WAKTS208060	WAKTS210060
65	WAKTS205065	WAKTS206065	WAKTS208065	WAKTS210065
70	WAKTS205070	WAKTS206070	WAKTS208070	WAKTS210070
75	WAKTS205075	WAKTS206075	WAKTS208075	WAKTS210075
80	WAKTS205080	WAKTS206080	WAKTS208080	WAKTS210080
90	WAKTS205090	WAKTS206090	WAKTS208090	WAKTS210090
100	WAKTS205100	WAKTS206100	WAKTS208100	WAKTS210100
110		WAKTS206110	WAKTS208110	
120		WAKTS206120	WAKTS208120	
130		WAKTS206130	WAKTS208130	
140		WAKTS206140	WAKTS208140	
150			WAKTS208150	

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative.

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F