




WA3THS2

SS - 304

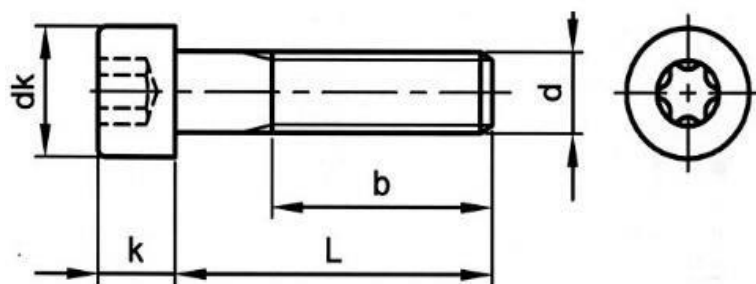

ISO 14579 SOCKET HEAD CAP SCREW 6 LOBE (Torx) Partially Threaded

| Size d →<br>Parameter ↓  | M2.5x0.45 | M3x0.5 | M4x0.7 | M5x0.8 | M6x1.0 | M8x1.25 | M10x1.5 |
|--------------------------|-----------|--------|--------|--------|--------|---------|---------|
| dk Max                   | 4.50      | 5.50   | 7.00   | 8.50   | 10.00  | 13.00   | 16.00   |
| dk Min                   | 4.32      | 5.32   | 6.78   | 8.28   | 9.78   | 12.73   | 15.73   |
| k Max                    | 2.50      | 3.00   | 4.00   | 5.00   | 6.00   | 8.00    | 10.00   |
| k Min                    | 2.36      | 2.86   | 3.82   | 4.82   | 5.70   | 7.64    | 9.64    |
| Thread length<br>b (ref) | 17.00     | 18.00  | 20.00  | 22.00  | 24.00  | 28.00   | 32.00   |
| Drive Bit                | T8        | T10    | T20    | T25    | T30    | T40     | T50     |

Quote the item code given below with your order/enquiries.

Dimensions in mm

| Dia d →<br>Length ↓ | M2.5x0.45    | M3x0.5       | M4x0.7       | M5x0.8       | M6x1.0       | M8x1.25      | M10x1.5      |
|---------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 25                  | WA3THS220525 | WA3THS203025 |              |              |              |              |              |
| 30                  | WA3THS220530 | WA3THS203030 | WA3THS204030 | WA3THS205030 |              |              |              |
| 35                  | WA3THS220535 | WA3THS203035 | WA3THS204035 | WA3THS205035 | WA3THS206035 |              |              |
| 40                  | WA3THS203040 | WA3THS203040 | WA3THS204040 | WA3THS205040 | WA3THS206040 | WA3THS208040 |              |
| 45                  |              | WA3THS203045 | WA3THS204045 | WA3THS205045 | WA3THS206045 | WA3THS208045 | WA3THS210045 |
| 50                  |              | WA3THS203050 | WA3THS204050 | WA3THS205050 | WA3THS206050 | WA3THS208050 | WA3THS210050 |
| 55                  |              | WA3THS203055 | WA3THS204055 | WA3THS205055 | WA3THS206055 | WA3THS208055 | WA3THS210055 |
| 60                  |              | WA3THS203060 | WA3THS204060 | WA3THS205060 | WA3THS206060 | WA3THS208060 | WA3THS210060 |
| 65                  |              |              | WA3THS204065 | WA3THS205065 | WA3THS206065 | WA3THS208065 | WA3THS210065 |
| 70                  |              |              | WA3THS204070 | WA3THS205070 | WA3THS206070 | WA3THS208070 | WA3THS210070 |
| 75                  |              |              | WA3THS204075 | WA3THS205075 | WA3THS206075 | WA3THS208075 | WA3THS210075 |
| 80                  |              |              | WA3THS204080 | WA3THS205080 | WA3THS206080 | WA3THS208080 | WA3THS210080 |
| 90                  |              |              |              | WA3THS205090 | WA3THS206090 | WA3THS208090 | WA3THS210090 |
| 100                 |              |              |              | WA3THS205100 | WA3THS206100 | WA3THS208100 | WA3THS210100 |
| 120                 |              |              |              |              | WA3THS206120 | WA3THS208120 | WA3THS210120 |
| 130                 |              |              |              |              |              | WA3THS208130 | WA3THS210130 |
| 150                 |              |              |              |              |              | WA3THS208150 | WA3THS210150 |

Sizes in BROWN are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

**Note:** All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F