




7019386466

WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

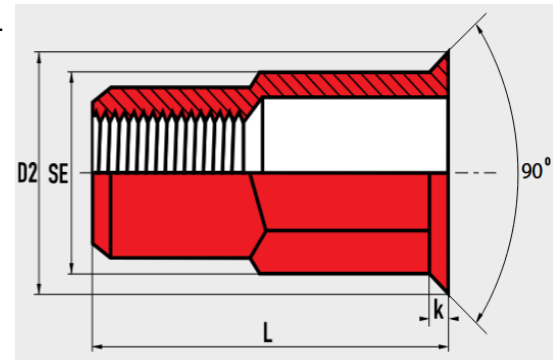

W2NO3RS4 SS 316

BLIND RIVET NUT OPEN Type [Semi-Hexagonal Shank Reduced CSK]

Quote the item code given below with your order/enquiries.

Dimensions in mm

Thread Size	Part No	Grip Range	SW1	Body Dia SW	D2	L	k	Pull-In	Maximum Torque
Dia			Hole Size Hex	Across Flat	Collar Dia	Body Length	Collar Thickness		
M3x0.5 1GR	W2NO3RS403001	0.3-1.5 mm	5.1 mm	5.0	6.0	9.0	0.5	4000 N	2.5 Nm
M4x0.7 1GR	W2NO3RS404001	0.5-2.0 mm	6.1 mm	6.0	7.0	12.0	0.6	6300 N	3.0 Nm
M5x0.8 1GR	W2NO3RS405001	0.5-2.5 mm	7.1 mm	7.0	8.0	14.0	0.6	8800 N	6.0 Nm
M6x1.0 1GR	W2NO3RS406001	0.5-3.0 mm	9.1 mm	9.0	10.0	16.0	0.6	14000 N	10.0 Nm
M8x1.25 1GR	W2NO3RS408001	0.5-3.0 mm	11.1 mm	11.0	12.0	17.0	0.6	15500 N	24.0 Nm
M10x1.5 1GR	W2NO3RS410001	1.0-4.0 mm	13.1 mm	13.0	14.0	20.5	0.8	19500 N	45.0 Nm
M12x1.75 1GR	W2NO3RS412001	1.0-4.0 mm	13.1 mm	16.0	17.5	24.0	0.8	21500 N	48.0 Nm

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F