




WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

W20uM

MS-ZN

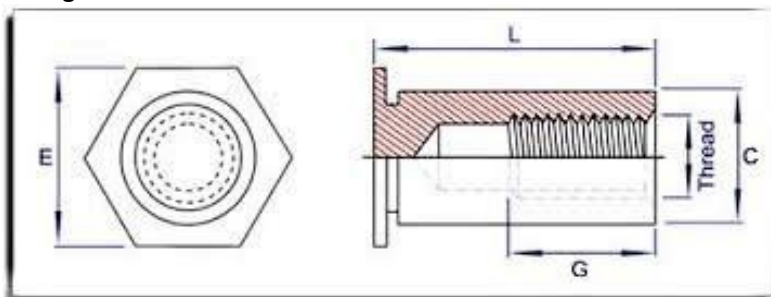

BLIND STANDOFF BSOS (Unified Series)

Size	#4-40	#4-40 ALT	#6-32	#6-32 ALT	#8-32	#10-32
Thread Code	440	6440	632	8632	832	032
C +0.000 -0.005	0.165	0.212	0.212	0.280	0.280	0.280
H nom	0.187	0.250	0.250	0.312	0.312	0.312
Hole Size in Sheet +0.003	0.166	0.213	0.213	0.281	0.281	0.281
Min sheet thickness	0.04	0.04	0.04	0.05	0.05	0.05
Min Dist. Hole C/L to edge	0.23	0.27	0.27	0.31	0.31	0.31
Max tightening torque for mating screw in.lbs.	3.50	3.50	6.60	6.60	14.00	24.60

Quote the item code given below with your order/ inquiries:

Dimensions in mm

			Thread Size					
G Min	Length	Length Code	#4-40	#4-40 ALT	#6-32	#6-32 ALT	#8-32	#10-32
-	3/16 (5mm)	6	W20uM44005	W20uM644005	W20uM63205	W20uM863205	W20uM83205	
	1/4 (6mm)	8	W20uM44006	W20uM644006	W20uM63206	W20uM863206	W20uM83206	W20u1M13206
0.156"	5/16 (8mm)	10	W20uM44008	W20uM644008	W20uM63208	W20uM863208	W20uM83208	W20u1M13208
	3/8 (10mm)	12	W20uM44010	W20uM644010	W20uM63210	W20uM863210	W20uM83210	W20u1M13210
0.187"	7/16 (11mm)	14	W20uM44011	W20uM644011	W20uM63211	W20uM863211	W20uM83211	W20u1M13211
0.25"	1/2 (12mm)	16	W20uM44012	W20uM644012	W20uM63212	W20uM863212	W20uM83212	W20u1M13212
	9/16 (14mm)	18	W20uM44014	W20uM644014	W20uM63214	W20uM863214	W20uM83214	W20u1M13214
	5/8 (16mm)	20	W20uM44016	W20uM644016	W20uM63216	W20uM863216	W20uM83216	W20u1M13216
0.375"	3/4 (20mm)	24	W20uM44020	W20uM644020	W20uM63220	W20uM863220	W20uM83220	W20u1M13220
	7/8 (22mm)	28	W20uM44022	W20uM644022	W20uM63222	W20uM863222	W20uM83222	W20u1M13222
	1 (25mm)	32	W20uM44025	W20uM644025	W20uM63225	W20uM863225	W20uM83225	W20u1M13225
Length Tolerance +0.003 -0.006								

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F