




WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

W20US2

SS 304

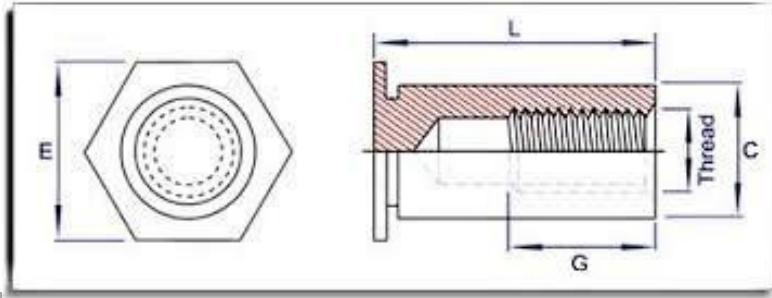

BLIND STANDOFF BSOS (Unified Series)

Size	#4-40	#4-40 ALT	#6-32	#6-32 ALT	#8-32	#10-32
Thread Code	440	6440	632	8632	832	032
C +0.000 -0.005	0.165	0.212	0.212	0.280	0.280	0.280
H nom	0.187	0.250	0.250	0.312	0.312	0.312
Hole Size in Sheet +0.003	0.166	0.213	0.213	0.281	0.281	0.281
Min sheet thickness	0.04	0.04	0.04	0.05	0.05	0.05
Min Dist. Hole C/L to edge	0.23	0.27	0.27	0.31	0.31	0.31
Max tightening torque for mating screw in.lbs.	3.50	3.50	6.60	6.60	14.00	24.60

Quote the item code given below with your order/ inquiries:

Dimensions in mm

			Thread Size					
G Min	Length	Length Code	#4-40	#4-40 ALT	#6-32	#6-32 ALT	#8-32	#10-32
-	3/16 (5mm)	6	W20uS244005	W20uS2644005	W20uS263205	W20uS2863205	W20uS283205	
	1/4 (6mm)	8	W20uS244006	W20uS2644006	W20uS263206	W20uS2863206	W20uS283206	W20u1S213206
0.156"	5/16 (8mm)	10	W20uS244008	W20uS2644008	W20uS263208	W20uS2863208	W20uS283208	W20u1S213208
	3/8 (10mm)	12	W20uS244010	W20uS2644010	W20uS263210	W20uS2863210	W20uS283210	W20u1S213210
0.187"	7/16 (11mm)	14	W20uS244011	W20uS2644011	W20uS263211	W20uS2863211	W20uS283211	W20u1S213211
0.25"	1/2 (12mm)	16	W20uS244012	W20uS2644012	W20uS263212	W20uS2863212	W20uS283212	W20u1S213212
	9/16 (14mm)	18	W20uS244014	W20uS2644014	W20uS263214	W20uS2863214	W20uS283214	W20u1S213214
	5/8 (16mm)	20	W20uS244016	W20uS2644016	W20uS263216	W20uS2863216	W20uS283216	W20u1S213216
0.375"	3/4 (20mm)	24	W20uS244020	W20uS2644020	W20uS263220	W20uS2863220	W20uS283220	W20u1S213220
	7/8 (22mm)	28	W20uS244022	W20uS2644022	W20uS263222	W20uS2863222	W20uS283222	W20u1S213222
	1 (25mm)	32	W20uS244025	W20uS2644025	W20uS263225	W20uS2863225	W20uS283225	W20u1S213225
Length Tolerance +0.003 -0.006								

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F