




WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

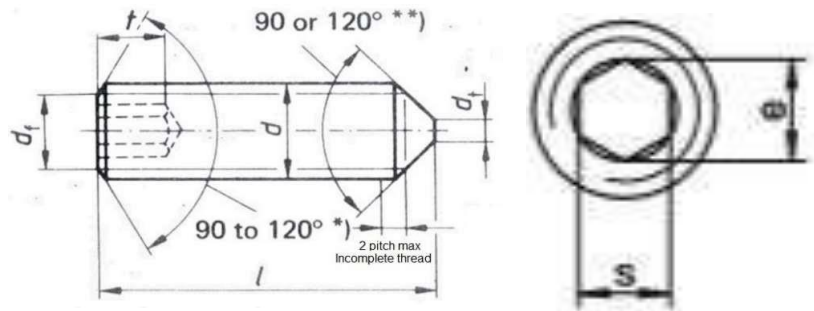

WGS2S2
AISI 304

DIN 914 GRUB SCREW CONE POINT

** Cone angle is 120° for lengths above the thick line and 90° for longer lengths

Parameter↓ Size→		M1.6x0.35	M2x0.4	M2.5x0.45	M3x0.5	M4x0.7	M5x0.8
df		Lower limit of minor thread diameter					
Cone end dt	max	-	-	-	-	-	-
	min	-	-	-	-	-	-
t Socket depth	min	0.70	0.80	1.20	1.20	1.50	2.00
	max	1.50	1.70	2.00	2.00	2.50	3.00
s min	key size	0.711	0.889	1.270	1.520	2.020	2.520
s max		0.724	0.902	1.295	1.545	2.045	2.560
e min		0.803	1.003	1.427	1.730	2.300	2.870

Quote the item code given below with your order/enquiries:

Dimensions in mm

Size → Length↓	M1.6x0.35	M2x0.4	M2.5x0.45	M3x0.5	M4x0.7	M5x0.8
2	WGS2S210602	WGS2S202002				
3	WGS2S210603	WGS2S202003	WGS2S220503	WGS2S203003	WGS2S204003	
4	WGS2S210604	WGS2S202004	WGS2S220504	WGS2S203004	WGS2S204004	WGS2S205004
5	WGS2S210605	WGS2S202005	WGS2S220505	WGS2S203005	WGS2S204005	WGS2S205005
6	WGS2S210606	WGS2S202006	WGS2S220506	WGS2S203006	WGS2S204006	WGS2S205006
8	WGS2S210608	WGS2S202008	WGS2S220508	WGS2S203008	WGS2S204008	WGS2S205008
10	WGS2S210610	WGS2S202010	WGS2S220510	WGS2S203010	WGS2S204010	WGS2S205010
12	WGS2S210612	WGS2S202012	WGS2S220512	WGS2S203012	WGS2S204012	WGS2S205012
14		WGS2S202014	WGS2S220514	WGS2S203014	WGS2S204014	WGS2S205014
16		WGS2S202016	WGS2S220516	WGS2S203016	WGS2S204016	WGS2S205016
18				WGS2S203018	WGS2S204018	WGS2S205018
20				WGS2S203020	WGS2S204020	WGS2S205020
25				WGS2S203025	WGS2S204025	WGS2S205025
30				WGS2S203030	WGS2S204030	WGS2S205030
35					WGS2S204035	WGS2S205035
40					WGS2S204040	WGS2S205040
45					WGS2S204045	WGS2S205045
50					WGS2S204050	WGS2S205050
55						WGS2S205055
60						WGS2S205060

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data strictly informative


Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F



WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

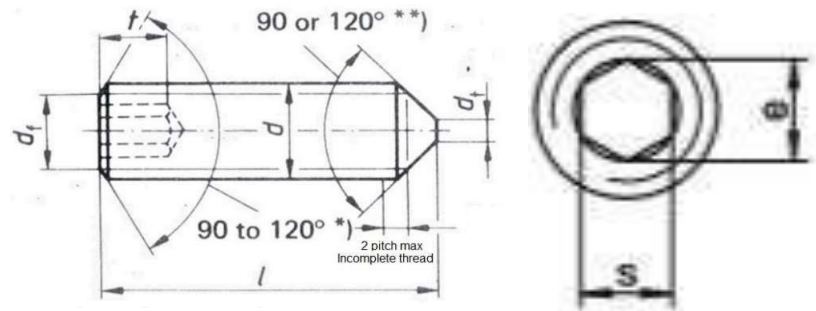

WGS2S2 AISI 304

DIN 914 GRUB SCREW CONE POINT

** Cone angle is 120° for lengths above the thick line and 90° for longer lengths

Parameter ↓ Size →		M6x1.0	M8x1.25	M10x1.5	M12x1.75	M16x2.0	M20x2.5
df		Lower limit of minor thread diameter					
cone end dt	max	1.50	2.00	2.50	3.00	4.00	5.00
	min	0.90	1.40	1.90	2.40	3.25	4.25
t socket depth	min	2.00	3.00	4.00	4.80	6.40	8.00
	max	3.50	5.00	6.00	8.00	10.00	12.00
s min	key size	3.02	4.020	5.020	6.020	8.025	10.025
s max		3.08	4.095	5.095	6.095	8.115	10.115
e min		3.44	4.58	5.72	6.86	9.15	11.43

Quote the item code given below with your order/enquiries.

Dimensions in mm

Size → Length ↓	M6x1.0	M8x1.25	M10x1.5	M12x1.75	M16x2.0	M20x2.5
6	WGS2S206006	WGS2S208006				
8	WGS2S206008	WGS2S208008				
10	WGS2S206010	WGS2S208010	WGS2S210010	WGS2S212010		
12	WGS2S206012	WGS2S208012	WGS2S210012	WGS2S212012		
14	WGS2S206014	WGS2S208014	WGS2S210014	WGS2S212014	WGS2S216014	
16	WGS2S206016	WGS2S208016	WGS2S210016	WGS2S212016	WGS2S216016	
18	WGS2S206018	WGS2S208018	WGS2S210018	WGS2S212018	WGS2S216018	
20	WGS2S206020	WGS2S208020	WGS2S210020	WGS2S212020	WGS2S216020	WGS2S220020
25	WGS2S206025	WGS2S208025	WGS2S210025	WGS2S212025	WGS2S216025	WGS2S220025
30	WGS2S206030	WGS2S208030	WGS2S210030	WGS2S212030	WGS2S216030	WGS2S220030
35	WGS2S206035	WGS2S208035	WGS2S210035	WGS2S212035	WGS2S216035	WGS2S220035
40	WGS2S206040	WGS2S208040	WGS2S210040	WGS2S212040	WGS2S216040	WGS2S220040
45	WGS2S206045	WGS2S208045	WGS2S210045	WGS2S212045	WGS2S216045	WGS2S220045
50	WGS2S206050	WGS2S208050	WGS2S210050	WGS2S212050	WGS2S216050	WGS2S220050
55	WGS2S206055	WGS2S208055	WGS2S210055	WGS2S212055	WGS2S216055	WGS2S220055
60	WGS2S206060	WGS2S208060	WGS2S210060	WGS2S212060	WGS2S216060	WGS2S220060
70		WGS2S208070	WGS2S210070	WGS2S212070	WGS2S216070	WGS2S220070
80		WGS2S208080	WGS2S210080	WGS2S212080	WGS2S216080	WGS2S220080
90				WGS2S212090	WGS2S216090	WGS2S220090
100					WGS2S216100	WGS2S220100

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data strictly informative.

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F