




WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

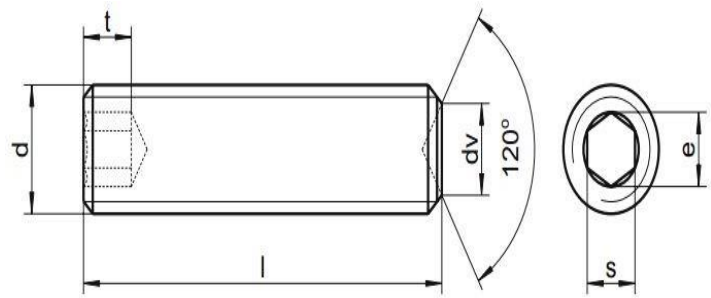

WGS4S4 SS 316

DIN 916 GRUB SCREW CUP POINT

Parameter↓ Size→		M1.6x0.35	M2x0.4	M2.5x0.45	M3x0.5	M4x0.7	M5x0.8
dv cup Dia	max	0.80	1.00	1.20	1.40	2.00	2.50
	min	0.55	0.75	0.95	1.15	1.75	2.25
t socket depth	min	0.70	0.80	1.20	1.20	1.50	2.0
	max	1.50	1.70	2.0	2.0	2.50	3.0
key size		0.7	0.90	1.30	1.50	2.00	2.50
s	min	0.711	0.889	1.270	1.520	2.020	2.520
	max	0.724	0.902	1.295	1.545	2.045	2.560
e	min	0.803	1.003	1.427	1.730	2.300	2.870

Quote the item code given below with your order/enquiries:

Dimensions in mm

Size→ Length↓	M1.6x0.35	M2x0.4	M2.5x0.45	M3x0.5	M4x0.7	M5x0.8
2	WGS4S410602	WGS4S402002				
3	WGS4S410603	WGS4S402003	WGS4S420503	WGS4S403003	WGS4S404003	
4	WGS4S410604	WGS4S402004	WGS4S403004	WGS4S403004	WGS4S404004	WGS4S405004
5	WGS4S410605	WGS4S402005	WGS4S420505	WGS4S403005	WGS4S404005	WGS4S405005
6	WGS4S410606	WGS4S402006	WGS4S420506	WGS4S403006	WGS4S404006	WGS4S405006
8	WGS4S410608	WGS4S402008	WGS4S420508	WGS4S403008	WGS4S404008	WGS4S405008
10	WGS4S410610	WGS4S402010	WGS4S420510	WGS4S403010	WGS4S404010	WGS4S405010
12	WGS4S410612	WGS4S402012	WGS4S420512	WGS4S403012	WGS4S404012	WGS4S405012
14		WGS4S402014	WGS4S420514	WGS4S403014	WGS4S404014	WGS4S405014
16		WGS4S402016	WGS4S420516	WGS4S403016	WGS4S404016	WGS4S405016
18		WGS4S402018	WGS4S420518	WGS4S403018	WGS4S404018	WGS4S405018
20				WGS4S403020	WGS4S404020	WGS4S405020
25				WGS4S403025	WGS4S404025	WGS4S405025
30				WGS4S403030	WGS4S404030	WGS4S405030
35				WGS4S403035	WGS4S404035	WGS4S405035
40				WGS4S403040	WGS4S404040	WGS4S405040
45					WGS4S404045	WGS4S405045
50					WGS4S404050	WGS4S405050
55						WGS4S405055
60						WGS4S405060

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.


Refer: ISO 3506-2 Annex F



WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

WGS4S4 SS 316

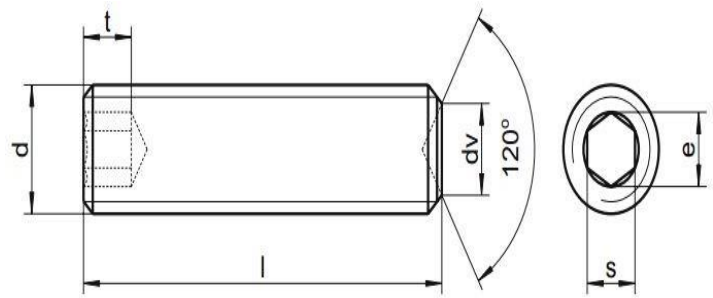

DIN 916 GRUB SCREW CUP POINT

Parameter↓ Size→		M6x1.0	M8x1.25	M10x1.5	M12x1.75	M16 x2.0	M20x2.5
dv cup Dia	max	3.00	5.00	6.00	8.00	10.00	14.00
	min	2.75	4.7	5.7	7.64	9.64	13.57
t socket depth	min	2.00	3.00	4.00	4.80	6.40	8.0
	max	3.50	5.00	6.0	8.0	10.00	12.0
key size		3	4.00	5.00	6.00	8.00	10.00
s	min	3.020	4.020	5.020	6.020	8.025	10.025
	max	3.080	4.095	5.095	6.095	8.115	10.115
e	min	3.440	4.580	5.720	6.860	9.150	11.430

Quote the item code given below with your order/enquiries.

Dimensions in mm

Size→ Length↓	M6x1.0	M8x1.25	M10x1.5	M12x1.75	M16 x2.0	M20x2.5
5	WGS4S406005					
6	WGS4S406006	WGS4S408006				
8	WGS4S406008	WGS4S408008	WGS4S410008			
10	WGS4S406010	WGS4S408010	WGS4S410010	WGS4S412010		
12	WGS4S406012	WGS4S408012	WGS4S410012	WGS4S412012		
14	WGS4S406014	WGS4S408014	WGS4S410014	WGS4S412014	WGS4S416014	
16	WGS4S406016	WGS4S408016	WGS4S410016	WGS4S412016	WGS4S416016	
18	WGS4S406018	WGS4S408018	WGS4S410018	WGS4S412018	WGS4S416018	
20	WGS4S406020	WGS4S408020	WGS4S410020	WGS4S412020	WGS4S416020	WGS4S420020
25	WGS4S406025	WGS4S408025	WGS4S410025	WGS4S412025	WGS4S416025	WGS4S420025
30	WGS4S406030	WGS4S408030	WGS4S410030	WGS4S412030	WGS4S416030	WGS4S420030
35	WGS4S406035	WGS4S408035	WGS4S410035	WGS4S412035	WGS4S416035	WGS4S420035
40	WGS4S406040	WGS4S408040	WGS4S410040	WGS4S412040	WGS4S416040	WGS4S420040
45	WGS4S406045	WGS4S408045	WGS4S410045	WGS4S412045	WGS4S416045	WGS4S420045
50	WGS4S406050	WGS4S408050	WGS4S410050	WGS4S412050	WGS4S416050	WGS4S420050
55	WGS4S406055	WGS4S408055	WGS4S410055	WGS4S412055	WGS4S416055	WGS4S420055
60	WGS4S406060	WGS4S408060	WGS4S410060	WGS4S412060	WGS4S416060	WGS4S420060
70	WGS4S406070	WGS4S408070	WGS4S410070	WGS4S412070	WGS4S416070	WGS4S420070
80	WGS4S406080	WGS4S408080	WGS4S410080	WGS4S412080	WGS4S416080	WGS4S420080
90		WGS4S408090	WGS4S410090	WGS4S412090	WGS4S416090	WGS4S420090
100		WGS4S408100	WGS4S410100	WGS4S412100	WGS4S416100	WGS4S420100

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative.

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F