

Parameter ↓ Size →		M1.6x0.35	M2 x 0.4	M2.5 x 0.45	M3 x 0.5	M4 x 0.7	M5 x 0.8
end dia dP	max	0.80	1.00	1.50	2.00	2.50	3.50
	min	0.55	0.75	1.25	1.75	2.25	3.20
socket depth t	min	0.70	0.80	1.20	1.20	1.50	2.00
	max	1.50	1.70	2.00	2.00	2.50	3.00
key size s	min	0.711	0.889	1.270	1.520	2.020	2.520
	max	0.724	0.902	1.295	1.545	2.045	2.560
key size		0.700	0.900	1.300	1.500	2.000	2.500
z (Short dog point)	min	0.40	0.50	0.63	0.75	1.00	1.25
	max	0.65	0.75	0.88	1.00	1.25	1.50
z (Long dog point)	min	0.80	1.00	1.25	1.50	2.00	3.00
	max	1.05	1.25	1.50	1.75	2.25	3.25

Quote the item code given below with your order/enquiries:

Dimensions in mm


Size → Length ↓	M1.6x0.35	M2 x 0.4	M2.5 x 0.45	M3 x 0.5	M4 x 0.7	M5 x 0.8
2	WGS1S210602	WGS1S202002				
3	WGS1S210603	WGS1S202003	WGS1S220503	WGS1S203003	WGS1S204003	
4	WGS1S210604	WGS1S202004	WGS1S203004	WGS1S203004	WGS1S204004	WGS1S205004
5	WGS1S210605	WGS1S202005	WGS1S220505	WGS1S203005	WGS1S204005	WGS1S205005
6	WGS1S210606	WGS1S202006	WGS1S220506	WGS1S203006	WGS1S204006	WGS1S205006
8	WGS1S210608	WGS1S202008	WGS1S220508	WGS1S203008	WGS1S204008	WGS1S205008
10	WGS1S210610	WGS1S202010	WGS1S220510	WGS1S203010	WGS1S204010	WGS1S205010
12	WGS1S210612	WGS1S202012	WGS1S220512	WGS1S203012	WGS1S204012	WGS1S205012
14		WGS1S202014	WGS1S220514	WGS1S203014	WGS1S204014	WGS1S205014
16		WGS1S202016	WGS1S220516	WGS1S203016	WGS1S204016	WGS1S205016
18				WGS1S203018	WGS1S204018	WGS1S205018
20				WGS1S203020	WGS1S204020	WGS1S205020
25				WGS1S203025	WGS1S204025	WGS1S205025
30				WGS1S203030	WGS1S204030	WGS1S205030
35				WGS1S203035	WGS1S204035	WGS1S205035
40				WGS1S203040	WGS1S204040	WGS1S205040
45					WGS1S204045	WGS1S205045
50					WGS1S204050	WGS1S205050
55						WGS1S205055
60						WGS1S205060

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F

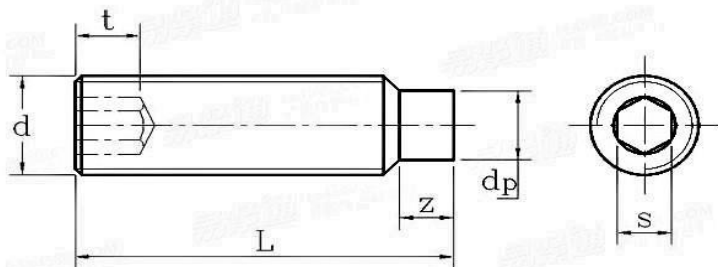

Parameter↓ Size→		M6 x 1.0	M8 x 1.25	M10 x 1.5	M12 x 1.75	M16 x 2.0	M20 x 2.5
end dia dP	max	4.00	5.50	7.00	8.50	12.00	15.00
	min	3.70	5.20	6.64	8.14	11.57	14.57
socket depth t	min	2.00	3.00	4.00	4.80	6.40	8.00
	max	3.50	5.00	6.00	8.00	10.00	12.00
key size s	min	3.020	4.020	5.020	6.020	8.025	10.025
	max	3.080	4.095	5.095	6.095	8.115	10.115
key size		3.000	4.000	5.000	6.000	8.000	10.000
z (Short dog point)	min	1.50	2.00	2.50	3.00	4.00	5.00
	max	1.75	2.25	2.75	3.00	4.00	5.00
z (Long dog point)	min	3.00	4.00	5.00	6.00	8.00	10.00
	max	3.25	4.30	5.30	6.30	8.36	10.36

Quote the item code given below with your order/enquiries:

Dimensions in mm

Size→ Length↓	M6 x 1.0	M8 x 1.25	M10 x 1.5	M12 x 1.75	M16 x 2.0	M20 x 2.5
5	WGS1S206005					
6	WGS1S206006	WGS1S208006	WGS1S210006			
8	WGS1S206008	WGS1S208008	WGS1S210008	WGS1S212008		
10	WGS1S206010	WGS1S208010	WGS1S210010	WGS1S212010		
12	WGS1S206012	WGS1S208012	WGS1S210012	WGS1S212012		
14	WGS1S206014	WGS1S208014	WGS1S210014	WGS1S212014	WGS1S216014	
16	WGS1S206016	WGS1S208016	WGS1S210016	WGS1S212016	WGS1S216016	
18	WGS1S206018	WGS1S208018	WGS1S210018	WGS1S212018	WGS1S216018	
20	WGS1S206020	WGS1S208020	WGS1S210020	WGS1S212020	WGS1S216020	WGS1S220020
25	WGS1S206025	WGS1S208025	WGS1S210025	WGS1S212025	WGS1S216025	WGS1S220025
30	WGS1S206030	WGS1S208030	WGS1S210030	WGS1S212030	WGS1S216030	WGS1S220030
35	WGS1S206035	WGS1S208035	WGS1S210035	WGS1S212035	WGS1S216035	WGS1S220035
40	WGS1S206040	WGS1S208040	WGS1S210040	WGS1S212040	WGS1S216040	WGS1S220040
45	WGS1S206045	WGS1S208045	WGS1S210045	WGS1S212045	WGS1S216045	WGS1S220045
50	WGS1S206050	WGS1S208050	WGS1S210050	WGS1S212050	WGS1S216050	WGS1S220050
55	WGS1S206055	WGS1S208055	WGS1S210055	WGS1S212055	WGS1S216055	WGS1S220055
60	WGS1S206060	WGS1S208060	WGS1S210060	WGS1S212060	WGS1S216060	WGS1S220060
70	WGS1S206070	WGS1S208070	WGS1S210070	WGS1S212070	WGS1S216070	WGS1S220070
80	WGS1S206080	WGS1S208080	WGS1S210080	WGS1S212080	WGS1S216080	WGS1S220080
90		WGS1S208090	WGS1S210090	WGS1S212090	WGS1S216090	WGS1S220090
100		WGS1S208100	WGS1S210100	WGS1S212100	WGS1S216100	WGS1S220100
120		WGS1S208120	WGS1S210120	WGS1S212120		

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F