

W5C1S7

Spring Steel

DIN 471 External Circlip Type A

Quote the item code given below with your order/enquiries.

Dimensions in mm


Part Number	Circlip Dimensions						Groove Dimensions					
	Shaft D1	s	Tol	d3	Tol	a	b	d5	d2	Tol	M1	n
W5C1S703000	3	0.40	+0.00 -0.05	2.7	+0.06 -0.15	1.9	0.8	1.0	2.8	+0.00 -0.05	0.5	0.3
W5C1S704000	4	0.40		3.7		2.2	0.9	1.0	3.8		0.5	0.3
W5C1S705000	5	0.60		4.7		2.5	1.1	1.0	4.8		0.7	0.3
W5C1S706000	6	0.70	+0.00 -0.06	5.6	+0.09 -0.18	2.7	1.3	1.2	5.7	+0.00 -0.06	0.8	0.5
W5C1S707000	7	0.80		6.5		3.1	1.4	1.2	6.7		0.9	0.5
W5C1S708000	8	0.80		7.4		3.2	1.5	1.2	7.6		0.9	0.6
W5C1S709000	9	1.00	+0.00 -0.06	8.4	+0.18 -0.36	3.3	1.7	1.2	8.6	+0.00 -0.11	1.1	0.6
W5C1S710000	10	1.00		9.3		3.3	1.8	1.5	9.6		1.1	0.6
W5C1S711000	11	1.00		10.2		3.3	1.8	1.5	10.5		1.1	0.8
W5C1S712000	12	1.00		11.0		3.3	1.8	1.7	11.5		1.1	0.8
W5C1S713000	13	1.00		11.9		3.4	2.0	1.7	12.4		1.1	0.9
W5C1S714000	14	1.00		12.9		3.5	2.1	1.7	13.4		1.1	0.9
W5C1S715000	15	1.00		13.8		3.6	2.2	1.7	14.3		1.1	1.1
W5C1S716000	16	1.00		14.7		3.7	2.2	1.7	15.2		1.1	1.2
W5C1S717000	17	1.00		15.7		3.8	2.3	1.7	16.2		1.1	1.2
W5C1S718000	18	1.20		16.5		3.9	2.4	2.0	17.0		1.3	1.5
W5C1S719000	19	1.20	+0.00 -0.06	17.5	+0.21 -0.42	3.9	2.5	2.0	18.0	+0.00 -0.21	1.3	1.5
W5C1S720000	20	1.20		18.5		4.0	2.6	2.0	19.0		1.3	1.5
W5C1S721000	21	1.20		19.5		4.1	2.7	2.0	20.0		1.3	1.5
W5C1S722000	22	1.20		20.5		4.2	2.8	2.0	21.0		1.3	1.5
W5C1S723000	23	1.20		21.5		4.3	2.9	2.0	22.0		1.3	1.5
W5C1S724000	24	1.20		22.5		4.4	3.0	2.0	22.9		1.3	1.7
W5C1S725000	25	1.20		23.5		4.4	3.0	2.0	23.9		1.3	1.7
W5C1S726000	26	1.20		24.2		4.5	3.1	2.0	24.9		1.3	1.7
W5C1S727000	27	1.20		24.9		4.6	3.1	2.0	25.6		1.3	2.1
W5C1S728000	28	1.50		25.9		4.7	3.2	2.0	26.6		1.6	2.1
W5C1S729000	29	1.50	+0.00 -0.06	26.9	+0.25 -0.50	4.8	3.4	2.0	27.6	+0.00 -0.25	1.6	2.1
W5C1S730000	30	1.50		27.9		5.0	3.5	2.0	28.6		1.6	2.1
W5C1S731000	31	1.50		28.6		5.0	3.5	2.5	29.3		1.6	2.6
W5C1S732000	32	1.50		29.6		5.2	3.6	2.5	30.3		1.6	2.6
W5C1S733000	33	1.50		30.5		5.2	3.7	2.5	31.3		1.6	2.6
W5C1S734000	34	1.50		31.5		5.4	3.8	2.5	32.3		1.6	2.6
W5C1S735000	35	1.50		32.2		5.6	3.9	2.5	33.0		1.6	3.0
W5C1S736000	36	1.75		33.2		5.6	4.0	2.5	34.0		1.85	3.0
W5C1S737000	37	1.75		34.2		5.7	4.1	2.5	35.0		1.85	3.0
W5C1S738000	38	1.75		35.2		5.8	4.2	2.5	36.0		1.85	3.0
W5C1S739000	39	1.75	+0.00 -0.25	36.0	+0.39 -0.90	5.9	4.3	2.5	37.0	+0.00 -0.25	1.85	3.8
W5C1S740000	40	1.75		36.5		6.0	4.4	2.5	37.5		1.85	3.8
W5C1S741000	41	1.75		37.5		6.2	4.5	2.5	38.5		1.85	3.8
W5C1S742000	42	1.75		38.5		6.5	4.5	2.5	39.5		1.85	3.8
W5C1S744000	44	1.75		40.5		6.6	4.6	2.5	41.5		1.85	3.8

Sizes in BROWN are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F

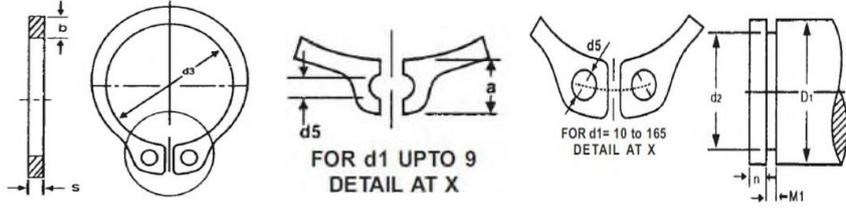

W5C1S7

Spring Steel

DIN 471 External Circlip Type A

Quote the item code given below with your order/enquiries.

Dimensions in mm


Part Number	Circlip Dimensions						Groove Dimensions					
	Shaft D1	s	Tol	d3	Tol	a	b	d5	d2	Tol	M1	n
W5C1S745000	45	1.75		41.5		6.7	4.7	2.5	42.5		1.85	3.8
W5C1S746000	46	1.75		42.5		6.7	4.8	2.5	43.5		1.85	3.8
W5C1S747000	47	1.75		53.5	+0.39	6.8	4.9	2.5	44.5		1.85	3.8
W5C1S748000	48	1.75		44.5	-0.90	6.9	5.0	2.5	45.5		1.85	3.8
W5C1S750000	50	2.00		45.8		6.9	5.1	2.5	47.0		2.15	4.5
W5C1S752000	52	2.00		47.8		7.0	5.2	2.5	49.0		2.15	4.5
W5C1S754000	54	2.00		49.8		7.1	5.3	2.5	51.0		2.15	4.5
W5C1S755000	55	2.00		50.8		7.2	5.4	2.5	52.0		2.15	4.5
W5C1S756000	56	2.00		51.8		7.3	5.5	2.5	53.0		2.15	4.5
W5C1S757000	57	2.00		52.8		7.3	5.5	2.5	54.0		2.15	4.5
W5C1S758000	58	2.00		53.8		7.3	5.6	2.5	55.0		2.15	4.5
W5C1S760000	60	2.00		55.8		7.4	5.8	2.5	57.0		2.15	4.5
W5C1S762000	62	2.00	+0.00	57.8		7.5	6.0	2.5	59.0		2.15	4.5
W5C1S763000	63	2.00	-0.07	58.8		7.6	6.2	2.5	60.0	+0.00	2.15	4.5
W5C1S765000	65	2.50		60.8	+0.46	7.8	6.3	3.0	62.0	-0.30	2.65	4.5
W5C1S767000	67	2.50		62.8	-1.10	7.9	6.4	3.0	64.0		2.65	4.5
W5C1S768000	68	2.50		63.5		8.0	6.5	3.0	65.0		2.65	4.5
W5C1S770000	70	2.50		65.5		8.1	6.6	3.0	67.0		2.65	4.5
W5C1S772000	72	2.50		67.5		8.2	6.8	3.0	69.0		2.65	4.5
W5C1S775000	75	2.50		70.5		8.4	7.0	3.0	72.0		2.65	4.5
W5C1S777000	77	2.50		72.5		8.5	7.2	3.0	74.0		2.65	4.5
W5C1S778000	78	2.50		73.5		8.6	7.3	3.0	75.0		2.65	4.5
W5C1S780000	80	2.50		74.5		8.6	7.4	3.0	76.5		2.65	5.3
W5C1S782000	82	2.50		76.5		8.7	7.6	3.0	78.5		2.65	5.3
W5C1S785000	85	3.00		79.5		8.7	7.8	3.5	81.5		3.15	5.3
W5C1S787000	87	3.00		81.5		8.8	7.9	3.5	83.5		3.15	5.3
W5C1S788000	88	3.00		82.5		8.8	8.0	3.5	84.5		3.15	5.3
W5C1S790000	90	3.00	+0.00	84.5		8.8	8.2	3.5	86.5	+0.00	3.15	5.3
W5C1S792000	92	3.00	-0.08	86.5		9.0	8.4	3.5	88.5	-0.35	3.15	5.3
W5C1S795000	95	3.00		89.5		9.4	8.6	3.5	91.5		3.15	5.3
W5C1S797000	97	3.00		91.5		9.4	8.8	3.5	93.5		3.15	5.3
W5C1S798000	98	3.00		92.5		9.5	9.0	3.5	94.5		3.15	5.3
W5C1S700100	100	3.00		94.5		9.6	9.0	3.5	96.5		3.15	5.3
W5C1S700102	102	4.00		95.0	+0.54	9.7	9.2	3.5	98.0		4.15	6.0
W5C1S700105	105	4.00		98.0	-1.30	9.9	9.3	3.5	101.0		4.15	6.0
W5C1S700107	107	4.00		100.0		10.0	9.5	3.5	103.0		4.15	6.0
W5C1S700108	108	4.00		100.0		10.0	9.5	3.5	104.0		4.15	6.0
W5C1S700110	110	4.00		103.0		10.1	9.6	3.5	106.0	+0.00	4.15	6.0
W5C1S700112	112	4.00		105.0		10.3	9.7	3.5	108.0	-0.54	4.15	6.0
W5C1S700115	115	4.00		107.0		10.6	9.8	3.5	111.0		4.15	6.0
W5C1S700117	117	4.00		110.0		10.8	10.0	3.5	113.0		4.15	6.0

Sizes in BROWN are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F

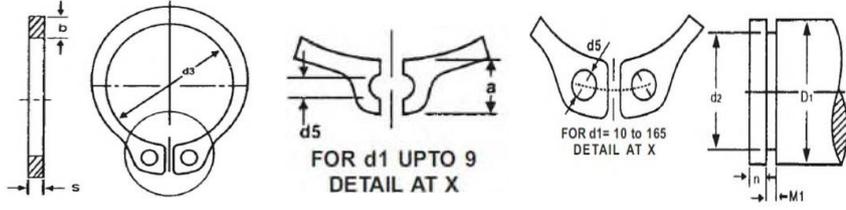

W5C1S7
Spring Steel

DIN 471 External Circlip Type A

Quote the item code given below with your order/enquiries.

Dimensions in mm

Part Number	Circlip Dimensions						Groove Dimensions					
	Shaft D1	s	Tol	d3	Tol	a	b	d5	d2	Tol	M1	n
W5C1S700118	118	4.00	+0.00 -0.10	110.0	+0.63 -1.50	10.9	10.1	3.5	114.0	+0.00 -0.63	4.15	6.0
W5C1S700120	120	4.00		113.0		11.0	10.2	3.5	116.0		4.15	6.0
W5C1S700122	122	4.00		115.0		11.2	10.3	4.0	118.0		4.15	6.0
W5C1S700125	125	4.00		118.0		11.4	10.4	4.0	121.0		4.15	6.0
W5C1S700127	127	4.00		120.0		11.4	10.5	4.0	123.0		4.15	6.0
W5C1S700128	128	4.00		120.0		11.5	10.6	4.0	124.0		4.15	6.0
W5C1S700130	130	4.00		123.0		11.6	10.7	4.0	126.0		4.15	6.0
W5C1S700132	132	4.00		125.0		11.7	10.8	4.0	128.0		4.15	6.0
W5C1S700135	135	4.00		128.0		11.8	11.0	4.0	131.0		4.15	6.0
W5C1S700137	137	4.00		130.0		11.9	11.0	4.0	133.0		4.15	6.0
W5C1S700138	138	4.00	130.0	11.9	11.1	4.0	134.0	4.15	6.0			
W5C1S700140	140	4.00	133.0	12.0	11.2	4.0	136.0	4.15	6.0			
W5C1S700142	142	4.00	135.0	12.1	11.3	4.0	138.0	4.15	6.0			
W5C1S700145	145	4.00	138.0	12.2	11.5	4.0	141.0	4.15	6.0			
W5C1S700150	150	4.00	142.0	13.0	11.8	4.0	145.0	4.15	6.0			
W5C1S700155	155	4.00	146.0	13.0	12.0	4.0	150.0	4.15	7.5			
W5C1S700160	160	4.00	151.0	13.3	12.2	4.0	155.0	4.15	7.5			
W5C1S700165	165	4.00	155.5	13.5	12.5	4.0	160.0	4.15	7.5			
W5C1S700170	170	4.00	160.5	13.5	12.9	4.0	165.0	4.15	7.5			
W5C1S700175	175	4.00	165.5	13.5	12.9	4.0	170.0	4.15	7.5			
W5C1S700180	180	4.00	170.5	14.2	13.5	4.0	175.0	4.15	7.5			
W5C1S700185	185	4.00	175.5	14.2	13.5	4.0	180.0	4.15	7.5			
W5C1S700190	190	4.00	180.5	14.2	14.0	4.0	185.0	4.15	7.5			
W5C1S700195	195	4.00	185.5	14.2	14.0	4.0	190.0	4.15	7.5			
W5C1S700200	200	4.00	190.5	14.2	14.0	4.0	195.0	4.15	7.5			
W5C1S700210	210	5.00	198.0	14.2	14.0	4.0	204.0	5.15	9.0			
W5C1S700215	215	5.00	203.0	14.2	14.0	4.0	209.0	5.15	9.0			
W5C1S700220	220	5.00	208.0	14.2	14.0	4.0	214.0	5.15	9.0			
W5C1S700230	230	5.00	218.0	14.2	14.0	4.0	224.0	5.15	9.0			
W5C1S700240	240	5.00	228.0	14.2	14.0	4.0	234.0	5.15	9.0			
W5C1S700250	250	5.00	238.0	14.2	14.0	4.0	244.0	5.15	9.0			
W5C1S700255	255	5.00	240.0	16.2	16.0	5.0	247.0	5.15	12.0			
W5C1S700260	260	5.00	245.0	16.2	16.0	5.0	252.0	5.15	12.0			
W5C1S700270	270	5.00	255.0	16.2	16.0	5.0	262.0	5.15	12.0			
W5C1S700280	280	5.00	265.0	16.2	16.0	5.0	272.0	5.15	12.0			
W5C1S700290	290	5.00	275.0	16.2	16.0	5.0	282.0	5.15	12.0			
W5C1S700300	300	5.00	285.0	16.2	16.0	5.0	292.0	5.15	12.0			

Sizes in BROWN are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F