




WFSTS2

SS 304

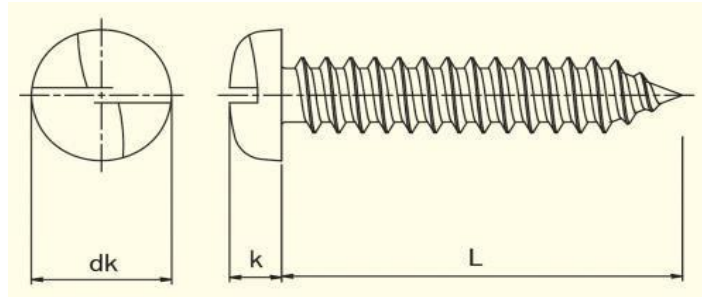

Forward Security Screw

Oneway Self Tapping Pan Head Screw

Size	#4 (2.9)	#6 (3.5)	#8 (4.2)	#10 (4.8)	#12 (5.5)	#14 (6.3)
dk max	5.60	6.80	8.35	9.20	10.80	12.60
dk min	5.00	6.10	7.30	8.20	9.40	11.10
k	2.30	2.80	3.20	3.70	4.00	4.60

Quote the item code given below with your order/enquiries.

Dimensions in mm

Dia→ Length↓	#4 (2.9)	#6 (3.5)	#8 (4.2)	#10 (4.8)	#12 (5.5)	#14 (6.3)
9.5 [3/8"]	WFSTS204905	WFSTS206905	WFSTS208905			
13 [1/2"]	WFSTS204013	WFSTS206013	WFSTS208013	WFSTS210013	WFSTS212013	WFSTS214013
16 [5/8"]	WFSTS204016	WFSTS206016	WFSTS208016	WFSTS210016	WFSTS212016	WFSTS214016
19 [3/4"]	WFSTS204019	WFSTS206019	WFSTS208019	WFSTS210019	WFSTS212019	WFSTS214019
25 [1"]	WFSTS204025	WFSTS206025	WFSTS208025	WFSTS210025	WFSTS212025	WFSTS214025
32 [1-1/4"]	WFSTS204032	WFSTS206032	WFSTS208032	WFSTS210032	WFSTS212032	WFSTS214032
38 [1-1/2"]	WFSTS204038	WFSTS206038	WFSTS208038	WFSTS210038	WFSTS212038	WFSTS214038
50 [2"]			WFSTS208050	WFSTS210050	WFSTS212050	WFSTS214050
63 [2-1/2"]					WFSTS212063	WFSTS214063
75 [3"]					WFSTS212075	WFSTS214075

Sizes in BROWN are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.**Refer:** ISO 3506-2 Annex F