




WBRLD4

Rivet Body: Steel Zinc Plated

Mandrel: Steel Zinc Plated

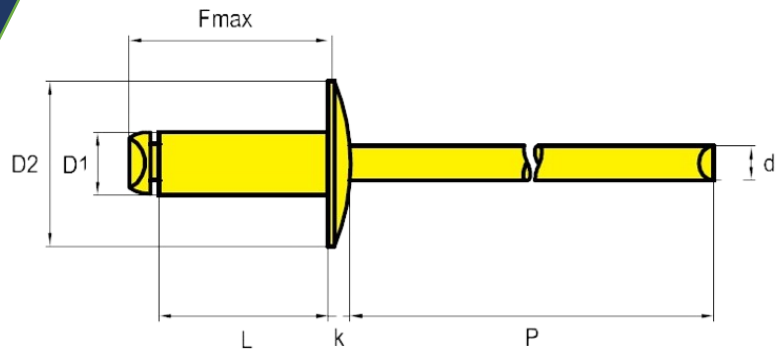

Blind Rivet Large Flange Dome Head

Rivet Size	Hole Size	Shear	Tensile	P	L	D1	D2	k	d
ϕ				Stem Length	Rivet Length Tolerance	Rivet Dia	Head Dia	Hd Thickness	Stem Dia
3.2	3.3 mm	1060N	1285N	≥ 27.0	+1.0/-0.2	3.2 +0.08/-0.10	9.5 +0.3/-0.7	≤ 2.0 mm	2.00
4.0	4.1 mm	1550N	1990N	≥ 27.0	+1.0/-0.2	4.0 +0.08/-0.15	12.0 +0.5/-1.0	≤ 2.5 mm	2.50
4.8 D2=14	4.9 mm	2300N	2920N	≥ 27.0	+1.0/-0.2	4.8 +0.08/-0.15	14.0 +0.5/-1.0	≤ 2.5 mm	2.90
4.8 D2=16							16.0 +0.5/-1.0		

Quote the item code given below with your order/enquiries.

Dimensions in mm

	F-Max		Part No
3.2 x 8.0	12.9mm	3.0-5.0mm	WBRLD430208
3.2 x 10.0	14.9mm	5.0-7.0mm	WBRLD430210
3.2 x 12.0	16.9mm	7.0-9.0mm	WBRLD430212
3.2 x 14.0	18.9mm	9.0-11.0mm	WBRLD430214
4.0 x 8.0	12.9mm	2.5-4.5mm	WBRLD404008
4.0 x 10.0	14.9mm	4.5-6.5mm	WBRLD404010
4.0 x 12.0	16.9mm	6.5-8.5mm	WBRLD404012
4.0 x 14.0	18.9mm	8.5-10.5mm	WBRLD404014
4.0 x 16.0	20.9mm	10.5-12.5mm	WBRLD404016

	Part No D2 = 14 mm	Part No D2 = 16 mm		F-Max K14/K16
4.8 x 10.0	WBRLD4481010	WBRLD4482010	4.5-6.0mm	14.9/15.4mm
4.8 x 12.0	WBRLD4481012	WBRLD4482012	6.0-8.0mm	16.9/17.4mm
4.8 x 14.0	WBRLD4481014	WBRLD4482014	8.0-10.0mm	18.9/19.4mm
4.8 x 16.0	WBRLD4481016	WBRLD4482016	10.0-11.5mm	20.9/21.4mm
4.8 x 18.0	WBRLD4481018	WBRLD4482018	11.5-13.5mm	22.9/23.4mm
4.8 x 20.0	WBRLD4481020	WBRLD4482020	13.5-15.0mm	24.9/25.4mm
4.8 x 22.0	WBRLD4481022	WBRLD4482022	15.0-17.0mm	26.9/27.4mm

Sizes in BROWN are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F