




WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

WBRM

Rivet body: Monel * Zinc Plated

Mandrel: Stainless Steel (AISI 304)

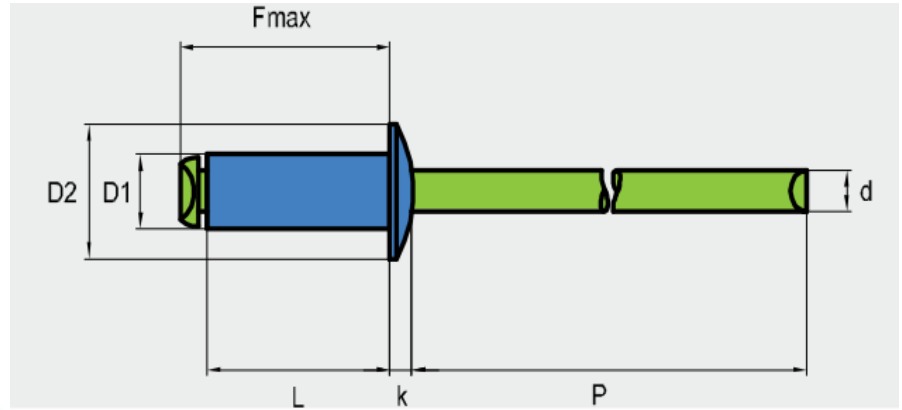

BLIND RIVET DOME HEAD (~DIN EN ISO 15983)

Quote the item code given below with your order/enquiries.

Dimensions in mm

Rivet Size	Hole Size	Shear	Tensile	P	D1	D2	d	k
Ø				Stem Length	Rivet Dia	Head Dia	Stem Dia	Head Thickness
3.2	3.3 mm	1500 N	1900 N	≥ 27.0	3.2 +0.08/-0.15	6.3 +/- 0.3	1.90	1.0 +/- 0.2
4.0	4.1 mm	2200 N	3000 N		4.0 +0.08/-0.15	7.9 +/- 0.3	2.30	1.2 +/- 0.3
4.8	4.9 mm	3300 N	3750 N		4.8 +0.08/-0.15	8.1 +/- 0.3	2.90	1.2 +/- 0.3

	F-Max		Part No
3.2 x 6.2	11.20	1.8-3.1 mm	WBRM32602
3.2 x 7.5	12.50	3.1-4.3 mm	WBRM32705
3.2 x 9.0	14.00	4.3-5.8 mm	WBRM32009
3.2 x 10.3	15.30	5.8-7.1 mm	WBRM32103
4.0 x 6.2	11.20	1.3-2.5 mm	WBRM04602
4.0 x 7.8	12.80	2.5-4.1 mm	WBRM04708
4.0 x 9.5	14.50	4.1-5.8 mm	WBRM04905
4.0 x 10.3	15.30	5.8-6.6 mm	WBRM04103
4.0 x 11.5	16.50	6.6 - 7.9 mm	WBRM04115

	F-Max		Part No
4.8 x 6.2	11.70	0.5-2.3 mm	WBRM48602
4.8 x 7.7	13.20	2.3-3.8 mm	WBRM48707
4.8 x 9.3	14.80	3.8-5.1 mm	WBRM48903
4.8 x 10.0	15.50	5.1-5.8 mm	WBRM48010
4.8 x 12.8	18.30	5.8-8.6 mm	WBRM48128
4.8 x 16.5	22.00	8.6-12.4 mm	WBRM48165
4.8 x 19.0	24.50	12.5 15.0 mm	WBRM48019

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F