


**Rivet Nut**

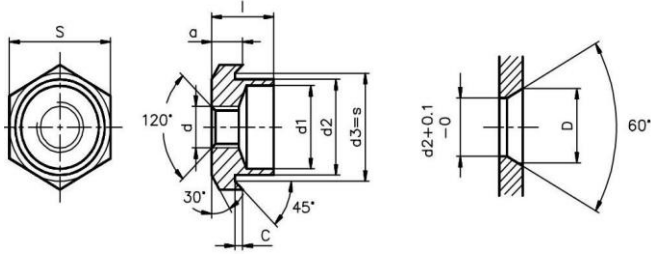

**AISS 303**

Quote the item code given below with your order/ inquiries:

Dimensions in mm

Nut Size(d)	Item Code	Total Length	Head Thickness	Collar Dia	Width across Flats	For Sheet thickness
Thread Size		<b>l</b>	<b>a</b>	<b>d2</b>	<b>S</b>	<b>t</b>
<b>M2 x 0.4</b>	WR57S302001	2.6	1.6	3.0	3.82-4.0	0.8-1.4
	WR57S302002	3.6				1.4-2.4
<b>M2.5 x 0.45</b>	WR57S320501	3.0	2.0	3.6	4.82-5.0	1.0-1.5
	WR57S320502	4.0				1.5-2.4
<b>M3 x 0.5</b>	WR57S303001	3.4	2.4	4.2	5.32-5.5	1.0-1.5
	WR57S303002	4.4				1.5-2.4
	WR57S303003	5.4				2.4-3.2
<b>M4 x 0.7</b>	WR57S304001	4.2	3.2	5.5	6.78-7.0	1.0-1.7
	WR57S304002	5.2				1.7-2.4
	WR57S304003	5.7				2.4-2.9
	WR57S304004	6.7				2.9-3.8
<b>M5 x 0.8</b>	WR57S305001	5.0	4.0	6.5	7.78-8.0	1.0-1.7
	WR57S305002	6.0				1.7-2.7
	WR57S305003	7.5				2.7-3.7
	WR57S305004	8.5				3.7-4.8
<b>M6 x 1.0</b>	WR57S306001	7.0	5.0	7.9	9.78-10.0	1.6-2.5
	WR57S306002	7.5				2.5-3.0
	WR57S306003	8.5				3.0-4.0
	WR57S306004	9.5				4.0-5.0
	WR57S306005	10.5				5.0-6.0
<b>M8 x 1.25</b>	WR57S308001	9.0	6.5	9.0	12.7-13.0	2.0-2.8
	WR57S308002	10.5				2.8-4.2
	WR57S308003	11.5				4.2-5.2

**Note:** All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F