




WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

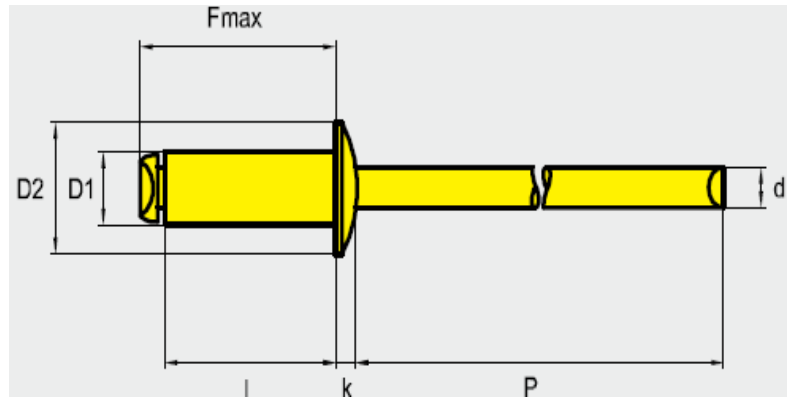

WBR S1

Rivet body: Steel Zinc Plated

Mandrel: Steel Zinc Plated

BLIND RIVET DOME HEAD (~DIN EN ISO 15979)

Quote the item code given below with your order/enquiries.

Dimensions in mm

Rivet Size	Hole Size	Tensile	Shear	D1	Rivet Length L	D2	k	d	P
$\emptyset$				Rivet Dia	Tolerance	Head Dia	Head Thickness	Stem Dia	Stem Length
3.2	3.3 mm	1285N	1060N	3.2 +0.08/-0.1	+1.0/-0.2	6.5 + 0 / -0.7	0.8 +/-0.2	2.00	≥ 27.0
4.0	4.1 mm	1990N	1550N	4.0 +0.08/-0.15	+1.0/-0.2	8.0 + 0 / -1.0	1.0 +/-0.3	2.50	≥ 27.0

	F-Max		Part No
3.2 x 5.0 mm	9.9 mm	0.5-1.5 mm	WBR S130205
3.2 x 6.0 mm	10.9 mm	1.5-3.0 mm	WBR S130206
3.2 x 8.0 mm	12.9 mm	3.0-5.0 mm	WBR S130208
3.2 x 10.0 mm	14.9 mm	5.0-7.0 mm	WBR S1302010
3.2 x 12.0 mm	16.9 mm	7.0-9.0 mm	WBR S1302012
3.2 x 14.0 mm	18.9 mm	9.0-11.0 mm	WBR S1302014
3.2 x 16.0 mm	20.9 mm	11.0-13.0 mm	WBR S1302016
3.2 x 18.0 mm	22.9 mm	13.0-15.0 mm	WBR S1302018
3.2 x 20.0 mm	24.9 mm	15.0-17.0 mm	WBR S1302020
3.2 x 25.0 mm	29.9 mm	17.0-22.0 mm	WBR S1302025
4.0 x 6.0 mm	10.9 mm	0.5-2.5 mm	WBR S104006
4.0 x 8.0 mm	12.9 mm	2.5-4.5 mm	WBR S104008

	Part No		F-Max
4.0 x 10.0 mm	WBR S104010	4.5-6.5 mm	14.9 mm
4.0 x 12.0 mm	WBR S104012	6.5-8.5 mm	16.9 mm
4.0 x 14.0 mm	WBR S104014	8.5-10.5mm	18.9 mm
4.0 x 16.0 mm	WBR S104016	10.5-12.5 mm	20.9 mm
4.0 x 18.0 mm	WBR S104018	12.5-14.5 mm	22.9 mm
4.0 x 20.0 mm	WBR S104020	14.5-16.5 mm	24.9 mm
4.0 x 22.0 mm	WBR S104022	15.5-17.5 mm	26.9 mm
4.0 x 24.0 mm	WBR S104024	17.5-19.5 mm	28.9 mm
4.0 x 25.0 mm	WBR S104025	18.5-20.5 mm	29.9 mm
4.0 x 26.0 mm	WBR S104026	19.5-21.5 mm	30.9 mm
4.0 x 30.0 mm	WBR S104030	20.0-25.0 mm	34.9 mm

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative


Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F



WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

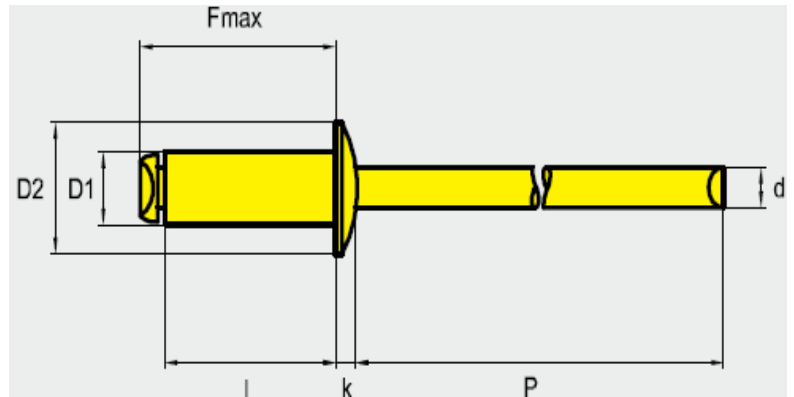

WBRS1

Rivet body: Steel Zinc Plated

Mandrel: Steel Zinc Plated

BLIND RIVET DOME HEAD (~DIN EN ISO 15979)

Dimensions in MM

Rivet Size	Hole Size	Tensile	Shear	D1	Rivet Length L	D2	k	d	P
$\emptyset$				Rivet Dia	Tolerance	Head Dia	Hd Thickness	Stem Dia	Stem Length
4.8	4.9 mm	2920N	2300N	4.8 +0.08/-0.15	+1.0/-0.2	9.5 + 0 / -1.0	1.1 + / -0.3	2.90	≥ 27.0
6.4	6.5 mm	5400N	4350N	6.4 +0.08/-0.15	+1.0/-0.2	13.0 + 0 / -1.5	1.8 + / -0.4	3.85	≥ 31.0

	F-Max		Part No
4.8 x 6.0 mm	11.4 mm	1.0-2.5 mm	WBRS140806
4.8 x 8.0 mm	13.4 mm	2.5-4.5 mm	WBRS140808
4.8 x 10.0 mm	15.4 mm	4.5-6.0 mm	WBRS1408010
4.8 x 12.0 mm	17.4 mm	6.0-8.0 mm	WBRS1408012
4.8 x 14.0 mm	19.4 mm	8.0-10.0 mm	WBRS1408014
4.8 x 16.0 mm	21.4 mm	10.0-11.5 mm	WBRS1408016
4.8 x 18.0 mm	23.4 mm	11.5-13.5 mm	WBRS1408018
4.8 x 20.0 mm	25.4 mm	13.5-15.0 mm	WBRS1408020
4.8 x 22.0 mm	27.4 mm	15.0-17.0 mm	WBRS1408022
4.8 x 25.0 mm	30.4 mm	17.0-20.0 mm	WBRS1408025
4.8 x 30.0 mm	35.4 mm	20.0-25.0 mm	WBRS1408030

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher

	Part No		F-Max
4.8 x 35.0 mm	WBRS140835	25.0-30.0 mm	40.4 mm
4.8 x 40.0 mm	WBRS140840	30.0-35.0 mm	45.4 mm

6.4 x 8.0 mm	WBRS160408	1.0-3.0 mm	14.4 mm
6.4 x 10.0 mm	WBRS160410	2.0-4.0 mm	16.4 mm
6.4 x 12.0 mm	WBRS160412	3.0-6.0 mm	18.4 mm
6.4 x 15.0 mm	WBRS160415	6.0-9.0 mm	21.4 mm
6.4 x 18.0 mm	WBRS160418	9.0-12.0 mm	24.4 mm
6.4 x 20.0 mm	WBRS160420	12.0-16.0 mm	26.4 mm
6.4 x 22.0 mm	WBRS160422	12.0-16.0 mm	28.4 mm
6.4 x 26.0 mm	WBRS160426	16.0-20.0 mm	32.4 mm
6.4 x 30.0 mm	WBRS160430	20.0-24.0 mm	36.4 mm

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F