




# WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post  
Bangalore - 560091

## WST6S4 SS316

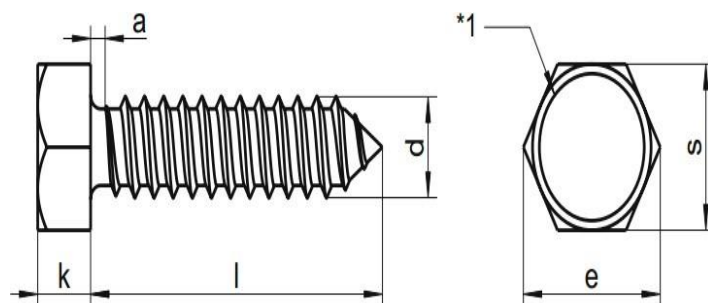

### DIN 7976 SELF TAPPING HEX SCREW

| Size              | ST2.2 | ST2.9 | ST3.5 | (ST3.9) | ST4.2 | ST4.8 | ST5.5 | ST6.3 |
|-------------------|-------|-------|-------|---------|-------|-------|-------|-------|
| ISO Size          | #2    | #4    | #6    | (#7)    | #8    | #10   | #12   | #14   |
| Pitch             | 0.80  | 1.10  | 1.30  | 1.3     | 1.40  | 1.60  | 1.80  | 1.80  |
| Across Flat s max | 3.20  | 5.00  | 5.50  | 7.00    | 7.00  | 8.00  | 8.00  | 10.00 |
| Across Flat s min | 3.02  | 4.82  | 5.32  | 6.78    | 6.78  | 7.78  | 7.78  | 9.78  |
| Head height k max | 1.42  | 1.62  | 2.42  | 2.42    | 2.92  | 3.12  | 4.15  | 4.95  |
| Head height k min | 1.18  | 1.38  | 2.18  | 2.18    | 2.68  | 2.88  | 3.85  | 4.65  |
| Head Dia e min    | 3.38  | 5.45  | 5.96  | 7.59    | 7.59  | 8.71  | 8.71  | 10.95 |
| a max             | 0.80  | 1.10  | 1.30  | 1.30    | 1.40  | 1.60  | 1.80  | 1.80  |

Quote the item code given below with your order/enquiries.

Dimensions in mm

| Size                | ST2.2       | ST2.9       | ST3.5       | (ST3.9)     | ST4.2       | ST4.8       | ST5.5       | ST6.3       |
|---------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Length ↓ ISO Size → | #2          | #4          | #6          | (#7)        | #8          | #10         | #12         | #14         |
| 4.5 [3/16"]         | WST6S402405 | WST6S404405 |             |             |             |             |             |             |
| 6.5 [1/4"]          | WST6S402605 | WST6S404605 | WST6S406605 | WST6S406605 |             |             |             |             |
| 8 [3/8"]            | WST6S402008 | WST6S404008 | WST6S406008 | WST6S406008 | WST6S408008 |             | WST6S412013 | WST6S414013 |
| 9.5 [3/8"]          | WST6S402905 | WST6S404905 | WST6S406905 | WST6S406905 | WST6S408905 | WST6S410905 | WST6S412016 | WST6S414016 |
| 13 [1/2"]           | WST6S402013 | WST6S404013 | WST6S406013 | WST6S406013 | WST6S408013 | WST6S410013 | WST6S412019 | WST6S414019 |
| 16 [5/8"]           | WST6S402016 | WST6S404016 | WST6S406016 | WST6S406016 | WST6S408016 | WST6S410016 | WST6S412022 | WST6S414022 |
| 19 [3/4"]           | WST6S402019 | WST6S404019 | WST6S406019 | WST6S406019 | WST6S408019 | WST6S410019 | WST6S412025 | WST6S414025 |
| 22 [7/8"]           | WST6S402022 | WST6S404022 | WST6S406022 | WST6S406022 | WST6S408022 | WST6S410022 | WST6S412032 | WST6S414032 |
| 25 [1"]             | WST6S402025 | WST6S404025 | WST6S406025 | WST6S406025 | WST6S408025 | WST6S410025 | WST6S412038 | WST6S414038 |
| 32 [1-1/4"]         |             | WST6S404032 | WST6S406032 | WST6S406032 | WST6S408032 | WST6S410032 | WST6S412045 | WST6S414045 |
| 38 [1-1/2"]         |             | WST6S404038 | WST6S406038 | WST6S406038 | WST6S408038 | WST6S410038 | WST6S412050 | WST6S414050 |
| 45 [1-3/4"]         |             | WST6S404045 | WST6S406045 | WST6S406045 | WST6S408045 | WST6S410045 | WST6S412060 | WST6S414060 |
| 50 [2"]             |             | WST6S404050 | WST6S406050 | WST6S406050 | WST6S408050 | WST6S410050 | WST6S412075 | WST6S414075 |
| 60 [2-1/2"]         |             |             | WST6S406060 | WST6S406060 | WST6S408060 | WST6S410060 | WST6S412100 | WST6S414100 |
| 75 [2-3/4"]         |             |             | WST6S406075 | WST6S406075 | WST6S408075 | WST6S410075 |             |             |
| 100 [4"]            |             |             |             |             | WST6S408100 | WST6S410100 |             |             |

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

**Note:** All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

**Refer:** ISO 3506-2 Annex F