




WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

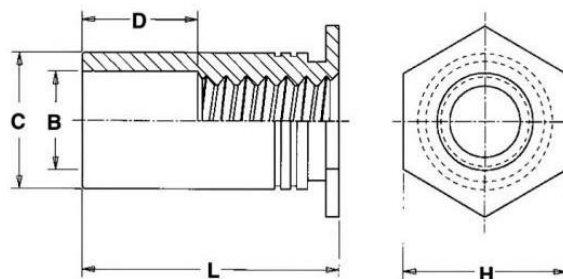

W21uA

ALUMINIUM 6000 Series

THROUGH STANDOFF (Unified Series)

Size	#4-40	#4-40 ALT	#6-32	#6-32 ALT	#8-32	#10-32
Thread Code	440	6440	632	8632	832	032
Counterbore dia B ± 0.005	0.125	0.125	0.156	0.156	0.188	0.203
C $+0.000 -0.005$	0.165	0.212	0.212	0.280	0.280	0.280
H nom	0.187	0.250	0.250	0.312	0.312	0.312
Hole Size in Sheet $+0.003$	0.166	0.213	0.213	0.281	0.281	0.281
Min sheet thickness	0.04	0.04	0.04	0.05	0.05	0.05
Min Dist. Hole C/L to edge	0.23	0.27	0.27	0.31	0.31	0.31
Max tightening torque for mating screw in.lbs.	3.50	3.50	6.60	6.60	14.00	24.60

Quote the item code given below with your order/ inquiries:

Dimensions in mm

			Thread Size					
D ± 0.5	Length	Length Code	#4-40	#4-40 ALT	#6-32	#6-32 ALT	#8-32	#10-32
	1/8 (3mm)	4	W21uA44003	W21uA644003	W21uA63203	W21uA863203	W21uA83203	
	3/16 (5mm)	6	W21uA44005	W21uA644005	W21uA63205	W21uA863205	W21uA83205	W21u1S213205
	1/4 (6mm)	8	W21uA44006	W21uA644006	W21uA63206	W21uA863206	W21uA83206	W21u1S213206
	5/16 (8mm)	10	W21uA44008	W21uA644008	W21uA63208	W21uA863208	W21uA83208	W21u1S213208
0.187"	3/8 (10mm)	12	W21uA44010	W21uA644010	W21uA63210	W21uA863210	W21uA83210	W21u1S213210
	7/16 (11mm)	14	W21uA44011	W21uA644011	W21uA63211	W21uA863211	W21uA83211	W21u1S213211
	1/2 (12mm)	16	W21uA44012	W21uA644012	W21uA63212	W21uA863212	W21uA83212	W21u1S213212
	9/16 (14mm)	18	W21uA44014	W21uA644014	W21uA63214	W21uA863214	W21uA83214	W21u1S213214
0.312"	5/8 (16mm)	20	W21uA44016	W21uA644016	W21uA63216	W21uA863216	W21uA83216	W21u1S213216
	3/4 (20mm)	24	W21uA44020	W21uA644020	W21uA63220	W21uA863220	W21uA83220	W21u1S213220
0.437"	7/8 (22mm)	28	W21uA44022	W21uA644022	W21uA63222	W21uA863222	W21uA83222	W21u1S213222
	1 (25mm)	32	W21uA44025	W21uA644025	W21uA63225	W21uA863225	W21uA83225	W21u1S213225
Length Tolerance $+0.003 -0.006$								

Sizes in BLUE are non-preferred. Availability is limited and MOQ higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F