




WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

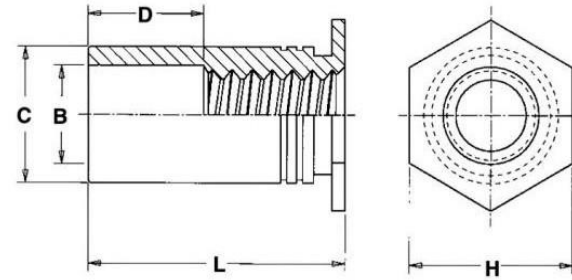

W21uS2

SS 304

THROUGH STANDOFF (Unified Series)

Size	#4-40	#4-40 ALT	#6-32	#6-32 ALT	#8-32	#10-32
Thread Code	440	6440	632	8632	832	032
Counterbore dia B ± 0.005	0.125	0.125	0.156	0.156	0.188	0.203
C $+0.000 -0.005$	0.165	0.212	0.212	0.280	0.280	0.280
H nom	0.187	0.250	0.250	0.312	0.312	0.312
Hole Size in Sheet $+0.003$	0.166	0.213	0.213	0.281	0.281	0.281
Min sheet thickness	0.04	0.04	0.04	0.05	0.05	0.05
Min Dist. Hole C/L to edge	0.23	0.27	0.27	0.31	0.31	0.31
Max tightening torque for mating screw in.lbs.	3.50	3.50	6.60	6.60	14.00	24.60

Quote the item code given below with your order/ inquiries:

Dimensions in mm

			Thread Size					
D ± 0.5	Length	Length Code	#4-40	#4-40 ALT	#6-32	#6-32 ALT	#8-32	#10-32
	1/8 (3mm)	4	W21uS244003	W21uS2644003	W21uS263203	W21uS2863203	W21uS283203	
	3/16 (5mm)	6	W21uS244005	W21uS2644005	W21uS263205	W21uS2863205	W21uS283205	W21uS213205
	1/4 (6mm)	8	W21uS244006	W21uS2644006	W21uS263206	W21uS2863206	W21uS283206	W21uS213206
	5/16 (8mm)	10	W21uS244008	W21uS2644008	W21uS263208	W21uS2863208	W21uS283208	W21uS213208
0.187"	3/8 (10mm)	12	W21uS244010	W21uS2644010	W21uS263210	W21uS2863210	W21uS283210	W21uS213210
	7/16 (11mm)	14	W21uS244011	W21uS2644011	W21uS263211	W21uS2863211	W21uS283211	W21uS213211
	1/2 (12mm)	16	W21uS244012	W21uS2644012	W21uS263212	W21uS2863212	W21uS283212	W21uS213212
	9/16 (14mm)	18	W21uS244014	W21uS2644014	W21uS263214	W21uS2863214	W21uS283214	W21uS213214
0.312"	5/8 (16mm)	20	W21uS244016	W21uS2644016	W21uS263216	W21uS2863216	W21uS283216	W21uS213216
	3/4 (20mm)	24	W21uS244020	W21uS2644020	W21uS263220	W21uS2863220	W21uS283220	W21uS213220
0.437"	7/8 (22mm)	28	W21uS244022	W21uS2644022	W21uS263222	W21uS2863222	W21uS283222	W21uS213222
	1 (25mm)	32	W21uS244025	W21uS2644025	W21uS263225	W21uS2863225	W21uS283225	W21uS213225
Length Tolerance $+0.003 -0.006$								

Sizes in BLUE are non-preferred. Availability is limited and MOQ higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F