




WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

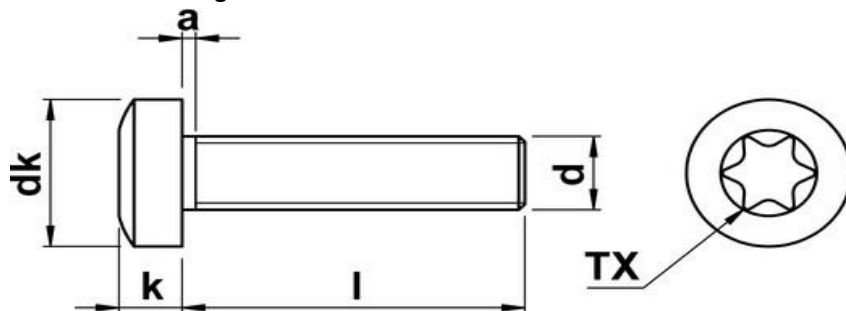

WTP6S2
SS304

ISO 14583 PAN 6 - Lobe

		* As per DIN			
Parameter	Size →	M1.6 x 0.35	M2 x 0.4	M2.5 x 0.45	M3 x 0.5
Head Diameter dk	Max	3.20	4.00	5.00	5.60 (6.00)*
	Min	2.90	3.70	4.70	5.30 (5.70)*
Head Height k	Max	1.30	1.60	2.10	2.40
	Min	1.16	1.46	1.96	2.26
Thread Runout a Max		0.80	0.80	0.90	1.00
Drive Bit [Recess Size]		T5	T6	T8	T10

Quote the item code given below with your order/
inquiries:

Dimensions in
mm

Length	Tolerance	M1.6 x 0.35	M2 x 0.4	M2.5 x 0.45	M3 x 0.5
2	± 0.20	WTP6S210602			
3	± 0.20	WTP6S210603	WTP6S202003	WTP6S220503	WTP6S203003
4	± 0.24	WTP6S210604	WTP6S202004	WTP6S220504	WTP6S203004
5	± 0.24	WTP6S210605	WTP6S202005	WTP6S220505	WTP6S203005
6	± 0.24	WTP6S210606	WTP6S202006	WTP6S220506	WTP6S203006
8	± 0.29	WTP6S210608	WTP6S202008	WTP6S220508	WTP6S203008
10	± 0.29	WTP6S210610	WTP6S202010	WTP6S220510	WTP6S203010
12	± 0.35	WTP6S210612	WTP6S202012	WTP6S220512	WTP6S203012
14	± 0.35	WTP6S210614	WTP6S202014	WTP6S220514	WTP6S203014
16	± 0.35	WTP6S210616	WTP6S202016	WTP6S220516	WTP6S203016
18	± 0.35	WTP6S210618	WTP6S202018	WTP6S220518	WTP6S203018
20	± 0.42	WTP6S210620	WTP6S202020	WTP6S220520	WTP6S203020
22	± 0.42		WTP6S202022	WTP6S220522	WTP6S203022
25	± 0.42		WTP6S202025	WTP6S220525	WTP6S203025
28	± 0.42			WTP6S220528	WTP6S203028
30	± 0.42			WTP6S220530	WTP6S203030
35	± 0.50				WTP6S203035
40	± 0.50				WTP6S203040
45	± 0.50				WTP6S203045
50	± 0.50				WTP6S203050
55	± 0.60				WTP6S203055
60	± 0.60				WTP6S203060

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.


Refer: ISO 3506-2 Annex F



WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

WTP6S2
SS304

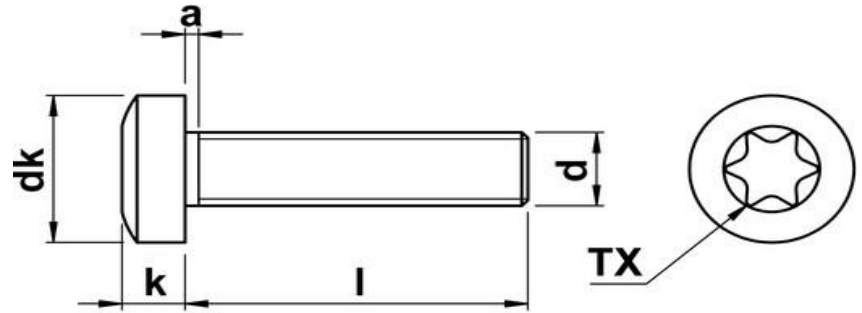

ISO 14583 PAN 6 - Lobe

		* As per DIN				
Parameter	Size→	M4 x 0.7	M5 x 0.8	M6 x 1.0	M8 x 1.25	M10 x 1.5
Head Diameter dk	Max	8.00	9.50 (10.00)*	12.00	16.00	20.00
	Min	7.64	9.14 (9.64)*	11.57	15.57	19.48
Head Height k	Max	3.10	3.70	4.60	6.00	7.50
	Min	2.92	3.52	4.30	5.70	7.14
Thread Runout a	Max	1.40	1.60	2.00	2.50	3.00
Drive Bit [Recess Size]		T20	T25	T30	T45	T50

Quote the item code given below with your order/enquiries.

Dimensions in mm

Length	Tolerance	M4 x 0.7	M5 x 0.8	M6 x 1.0	M8 x 1.25	M10 x 1.5
4	± 0.24	WTP6S204004				
5	± 0.24	WTP6S204005				
6	± 0.24	WTP6S204006	WTP6S205006			
8	± 0.29	WTP6S204008	WTP6S205008	WTP6S206008		
10	± 0.29	WTP6S204010	WTP6S205010	WTP6S206010	WTP6S208010	
12	± 0.35	WTP6S204012	WTP6S205012	WTP6S206012	WTP6S208012	
14	± 0.35	WTP6S204014	WTP6S205014	WTP6S206014	WTP6S208014	
16	± 0.35	WTP6S204016	WTP6S205016	WTP6S206016	WTP6S208016	WTP6S210016
18	± 0.35	WTP6S204018	WTP6S205018	WTP6S206018	WTP6S208018	WTP6S210018
20	± 0.42	WTP6S204020	WTP6S205020	WTP6S206020	WTP6S208020	WTP6S210020
22	± 0.42	WTP6S204022	WTP6S205022	WTP6S206022	WTP6S208022	WTP6S210022
25	± 0.42	WTP6S204025	WTP6S205025	WTP6S206025	WTP6S208025	WTP6S210025
28	± 0.42	WTP6S204028	WTP6S205028	WTP6S206028	WTP6S208028	WTP6S210028
30	± 0.42	WTP6S204030	WTP6S205030	WTP6S206030	WTP6S208030	WTP6S210030
35	± 0.50	WTP6S204035	WTP6S205035	WTP6S206035	WTP6S208035	WTP6S210035
40	± 0.50	WTP6S204040	WTP6S205040	WTP6S206040	WTP6S208040	WTP6S210040
45	± 0.50	WTP6S204045	WTP6S205045	WTP6S206045	WTP6S208045	WTP6S210045
50	± 0.50	WTP6S204050	WTP6S205050	WTP6S206050	WTP6S208050	WTP6S210050
55	± 0.60	WTP6S204055	WTP6S205055	WTP6S206055	WTP6S208055	WTP6S210055
60	± 0.60	WTP6S204060	WTP6S205060	WTP6S206060	WTP6S208060	WTP6S210060
65	± 0.60	WTP6S204065	WTP6S205065	WTP6S206065	WTP6S208065	WTP6S210065
70	± 0.60	WTP6S204070	WTP6S205070	WTP6S206070	WTP6S208070	WTP6S210070
75	± 0.60	WTP6S204075	WTP6S205075	WTP6S206075	WTP6S208075	WTP6S210075
80	± 0.60	WTP6S204080	WTP6S205080	WTP6S206080	WTP6S208080	WTP6S210080
90	± 0.70	WTP6S204090	WTP6S205090	WTP6S206090	WTP6S208090	WTP6S210090
100	± 0.70	WTP6S204100	WTP6S205100	WTP6S206100	WTP6S208100	WTP6S210100

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F