




W9C1S7

Spring Steel

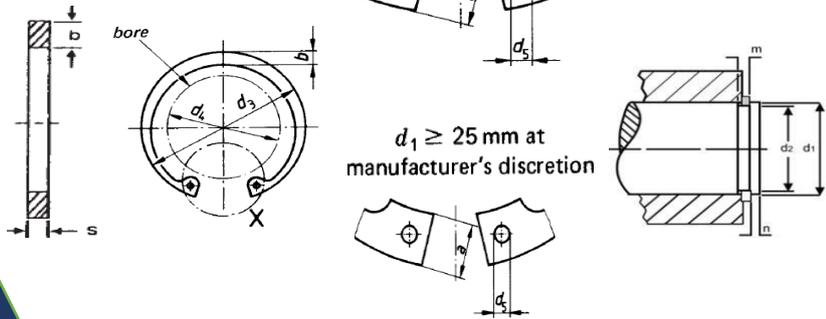

DIN 472 Internal Circlip Type J

Quote the item code given below with your order/enquiries.

Dimensions in mm

Part Number	Circlip Dimensions					Groove Dimensions						
	Bore d1	s	Tol	d3	Tol	a	b	d5	d2	Tol	M1	n
W9C1S708000	8	0.80	+0.00	8.7	+0.41 -0.15	2.4	1.1	1.0	8.4	+0.11	0.90	0.6
W9C1S709000	9	0.80	-0.06	9.8		2.5	1.3	1.0	9.4	-0.00	0.90	0.6
W9C1S710000	10	1.00	+0.00 -0.07	10.8		3.2	1.4	1.2	10.4	+0.13 -0.00	1.10	0.6
W9C1S711000	11	1.00		11.8		3.3	1.5	1.2	11.4		1.10	0.6
W9C1S712000	12	1.00		13.0		3.4	1.7	1.5	12.5		1.10	0.8
W9C1S713000	13	1.00		14.1		3.6	1.8	1.5	13.6		1.10	0.9
W9C1S714000	14	1.00		15.1		3.7	1.8	1.7	14.6		1.10	0.9
W9C1S715000	15	1.00		16.2		3.7	2.0	1.7	15.7		1.10	1.1
W9C1S716000	16	1.00		17.3		3.8	2.0	1.7	16.8		1.10	1.2
W9C1S717000	17	1.00		18.3		3.9	2.1	1.7	17.8		1.10	1.2
W9C1S718000	18	1.00		19.5	4.1	2.2	2.0	19.0	+0.15 -0.00		1.10	1.5
W9C1S719000	19	1.00		20.5	4.1	2.2	2.0	20.0			1.10	1.5
W9C1S720000	20	1.00	21.5	4.2	2.3	2.0	21.0	1.10		1.5		
W9C1S721000	21	1.00	22.5	4.2	2.4	2.0	22.0	1.10		1.5		
W9C1S722000	22	1.00	23.5	4.2	2.5	2.0	23.0	1.10		1.5		
W9C1S723000	23	1.20	24.6	4.2	2.5	2.0	24.1	+0.25 -0.00		1.30	1.5	
W9C1S724000	24	1.20	25.9	4.3	2.6	2.0	25.2			1.30	1.8	
W9C1S725000	25	1.20	26.9	4.5	2.7	2.0	26.2			1.30	1.8	
W9C1S726000	26	1.20	27.9	4.7	2.8	2.0	27.2			1.30	1.8	
W9C1S727000	27	1.20	29.1	4.7	2.9	2.0	28.4			1.30	2.1	
W9C1S728000	28	1.20	30.1	4.8	2.9	2.0	29.4		1.30	2.1		
W9C1S729000	29	1.20	31.1	4.8	3.0	2.0	30.4		+0.30 -0.00	1.30	2.1	
W9C1S730000	30	1.20	32.1	4.8	3.0	2.0	31.4			1.30	2.1	
W9C1S731000	31	1.20	33.4	5.2	3.1	2.5	32.7			1.30	2.6	
W9C1S732000	32	1.20	34.4	5.4	3.2	2.5	33.7			1.30	2.6	
W9C1S733000	33	1.20	35.5	5.4	3.3	2.5	34.7	1.30		2.6		
W9C1S734000	34	1.50	36.5	5.4	3.3	2.5	35.7	1.60		2.6		
W9C1S735000	35	1.50	37.8	5.4	3.4	2.5	37.0	1.60		3.0		
W9C1S736000	36	1.50	38.8	5.4	3.5	2.5	38.0	1.60		3.0		
W9C1S737000	37	1.50	39.8	5.5	3.6	2.5	39.0	+0.30 -0.00		1.60	3.0	
W9C1S738000	38	1.50	40.8	5.5	3.7	2.5	40.0			1.60	3.0	
W9C1S739000	39	1.50	42.0	5.6	3.8	2.5	41.0		1.60	3.8		
W9C1S740000	40	1.75	43.5	5.8	3.9	2.5	42.5		1.85	3.8		
W9C1S741000	41	1.75	44.5	5.9	4.0	2.5	43.5		1.85	3.8		
W9C1S742000	42	1.75	45.5	5.9	4.1	2.5	44.5		1.85	3.8		
W9C1S743000	43	1.75	46.5	5.9	4.2	2.5	45.5		1.85	3.8		
W9C1S744000	44	1.75	47.5	6.0	4.2	2.5	46.5		1.85	3.8		
W9C1S745000	45	1.75	48.5	6.2	4.3	2.5	47.5		1.85	3.8		
W9C1S746000	46	1.75	49.5	6.3	4.4	2.5	48.5		1.85	3.8		
W9C1S747000	47	1.75	50.5	6.4	4.4	2.5	49.5	1.85	3.8			
W9C1S748000	48	1.75	51.5	6.4	4.5	2.5	50.5	1.85	3.8			

Sizes in BROWN are non-preferred. Availability is limited and MOQ is higher.


Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F



**W9C1S7**  
Spring Steel

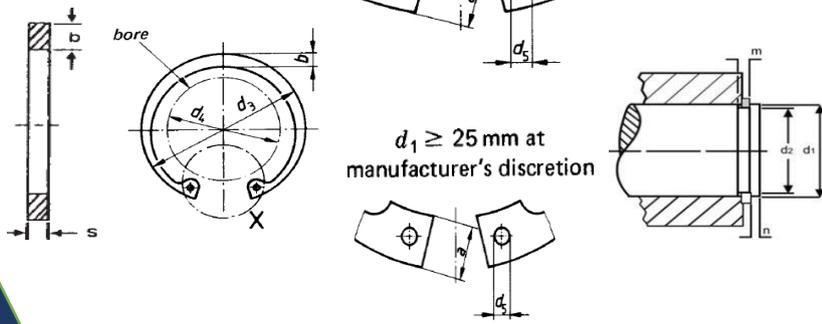

**DIN 472 Internal Circlip Type J**

Quote the item code given below with your order/enquiries.

Dimensions in mm

Part Number	Circlip Dimensions						Groove Dimensions					
	Bore d1	s	Tol	d3	Tol	a	b	d5	d2	Tol	M1	n
W9C1S750000	50	2.00	+0.00 -0.08	54.2	+1.15 -0.51	6.5	4.6	2.5	53.0	+0.35 -0.00	2.15	4.5
W9C1S752000	52	2.00		56.2		6.7	4.7	2.5	55.0		2.15	4.5
W9C1S754000	54	2.00		58.2		6.7	5.0	2.5	57.0		2.15	4.5
W9C1S755000	55	2.00		59.2		6.8	5.0	2.5	58.0		2.15	4.5
W9C1S756000	56	2.00		60.2		6.8	5.1	2.5	59.0		2.15	4.5
W9C1S757000	57	2.00		61.2		6.8	5.1	2.5	60.0		2.15	4.5
W9C1S758000	58	2.00		62.2		6.9	5.2	2.5	61.0		2.15	4.5
W9C1S760000	60	2.00		64.2		7.3	5.4	2.5	63.0		2.15	4.5
W9C1S762000	62	2.00		66.2		7.3	5.5	2.5	65.0		2.15	4.5
W9C1S763000	63	2.00		67.2		7.3	5.6	2.5	66.0		2.15	4.5
W9C1S765000	65	2.50		69.2		7.6	5.8	3.0	68.0		2.65	4.5
W9C1S767000	67	2.50		71.5		7.7	6.0	3.0	70.0		2.65	4.5
W9C1S768000	68	2.50		72.5		7.8	6.1	3.0	71.0		2.65	4.5
W9C1S770000	70	2.50		74.5		7.8	6.2	3.0	73.0		2.65	4.5
W9C1S772000	72	2.50		76.5		7.8	6.4	3.0	75.0		2.65	4.5
W9C1S775000	75	2.50	79.5	7.8	6.6	3.0	78.0	2.65	4.5			
W9C1S777000	77	2.50	82.5	8.5	6.8	3.0	80.0	2.65	4.5			
W9C1S778000	78	2.50	82.5	8.5	6.8	3.0	81.0	2.65	4.5			
W9C1S780000	80	2.50	85.5	8.5	7.0	3.0	83.5	2.65	5.3			
W9C1S782000	82	2.50	87.5	8.5	7.0	3.0	85.5	2.65	5.3			
W9C1S785000	85	3.00	90.5	8.6	7.2	3.5	88.5	3.15	5.3			
W9C1S787000	87	3.00	93.5	8.6	7.3	3.5	90.5	+0.40	3.15	5.3		
W9C1S788000	88	3.00	93.5	8.6	7.4	3.5	91.5	-0.00	3.15	5.3		
W9C1S790000	90	3.00	95.5	8.6	7.6	3.5	93.5	3.15	5.3			
W9C1S792000	92	3.00	97.5	8.7	7.8	3.5	95.5	3.15	5.3			
W9C1S795000	95	3.00	100.5	8.8	8.1	3.5	98.5	3.15	5.3			
W9C1S797000	97	3.00	103.5	9.0	8.2	3.5	100.5	3.15	5.3			
W9C1S798000	98	3.00	103.5	9.0	8.3	3.5	101.5	3.15	5.3			
W9C1S700100	100	3.00	105.5	9.2	8.4	3.5	103.5	3.15	5.3			
W9C1S700102	102	4.00	108.0	9.5	8.5	3.5	106.0	+0.60 -0.00	4.15	6.0		
W9C1S700105	105	4.00	112.0	9.5	8.7	3.5	109.0		4.15	6.0		
W9C1S700107	107	4.00	115.0	9.5	8.9	3.5	111.0		4.15	6.0		
W9C1S700108	108	4.00	115.0	9.5	8.9	3.5	112.0		4.15	6.0		
W9C1S700110	110	4.00	117.0	10.4	9.0	3.5	114.0		4.15	6.0		
W9C1S700112	112	4.00	119.0	10.5	9.1	3.5	116.0		4.15	6.0		
W9C1S700115	115	4.00	122.0	10.5	9.3	3.5	119.0	4.15	6.0			
W9C1S700117	117	4.00	125.0	10.7	9.6	3.5	121.0	4.15	6.0			
W9C1S700118	118	4.00	125.0	10.7	9.6	3.5	122.0	4.15	6.0			
W9C1S700120	120	4.00	127.0	11.0	9.7	3.5	124.0	4.15	6.0			
W9C1S700122	122	4.00	129.0	11.0	9.8	4.0	126.0	4.15	6.0			
W9C1S700125	125	4.00	132.0	11.0	10.0	4.0	129.0	4.15	6.0			

Sizes in BROWN are non-preferred. Availability is limited and MOQ is higher.


Data is strictly informative

**Note:** All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

**Refer:** ISO 3506-2 Annex F



**W9C1S7**  
Spring Steel

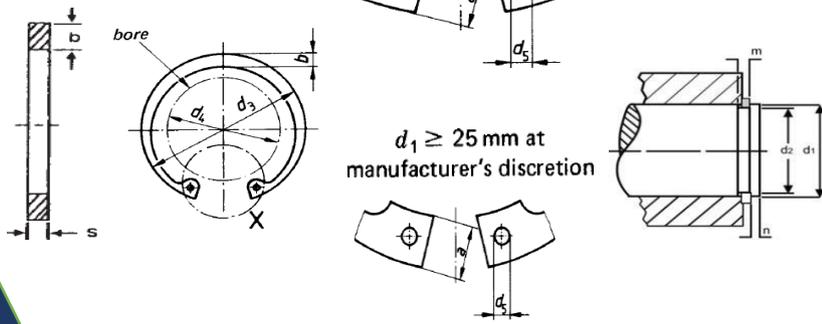

**DIN 472 Internal Circlip Type J**

Quote the item code given below with your order/enquiries.

Dimensions in mm

Part Number	Circlip Dimensions						Groove Dimensions					
	Bore d1	s	Tol	d3	Tol	a	b	d5	d2	Tol	M1	n
W9C1S700127	127	4.00	+0.00 -0.12	135.0	+1.55 -0.68	11.0	10.0	4.0	131.0	+0.70 -0.00	4.15	6.0
W9C1S700128	128	4.00		135.0		11.0	10.2	4.0	132.0		4.15	6.0
W9C1S700130	130	4.00		137.0		11.0	10.2	4.0	134.0		4.15	6.0
W9C1S700132	132	4.00		139.0		11.0	10.3	4.0	136.0		4.15	6.0
W9C1S700135	135	4.00		142.0		11.2	10.5	4.0	139.0		4.15	6.0
W9C1S700137	137	4.00		145.0		11.2	10.6	4.0	141.0		4.15	6.0
W9C1S700138	138	4.00		145.0		11.2	10.6	4.0	142.0		4.15	6.0
W9C1S700140	140	4.00		147.0		11.2	10.7	4.0	144.0		4.15	6.0
W9C1S700142	142	4.00		149.0		11.3	10.8	4.0	146.0		4.15	6.0
W9C1S700145	145	4.00		152.0		11.4	10.9	4.0	149.0		4.15	6.0
W9C1S700150	150	4.00		158.0		12.0	11.2	4.0	155.0		4.15	7.5
W9C1S700155	155	4.00		164.0		12.0	11.4	4.0	160.0		4.15	7.5
W9C1S700160	160	4.00		169.0		13.0	11.6	4.0	165.0		4.15	7.5
W9C1S700165	165	4.00		174.5		13.0	11.8	4.0	170.0		4.15	7.5
W9C1S700170	170	4.00		179.5		13.5	12.2	4.0	175.0		4.15	7.5
W9C1S700175	175	4.00		184.5		13.5	12.7	4.0	180.0		4.15	7.5
W9C1S700180	180	4.00		189.5		14.2	13.2	4.0	185.0		4.15	7.5
W9C1S700185	185	4.00	194.5	14.2	13.7	4.0	190.0	4.15	7.5			
W9C1S700190	190	4.00	199.5	14.2	13.8	4.0	195.0	4.15	7.5			
W9C1S700195	195	4.00	204.5	14.2	13.8	4.0	200.0	4.15	7.5			
W9C1S700200	200	4.00	209.5	14.2	14.0	4.0	205.0	4.15	7.5			
W9C1S700210	210	5.00	+0.00 -0.14	222.0	+1.75 -0.77	14.2	14.0	4.0	216.0	+0.80 -0.00	5.15	9.0
W9C1S700215	215	5.00		227.0		14.2	14.0	4.0	221.0		5.15	9.0
W9C1S700220	220	5.00		232.0		14.2	14.0	4.0	226.0		5.15	9.0
W9C1S700230	230	5.00		242.0		14.2	14.0	4.0	236.0		5.15	9.0
W9C1S700240	240	5.00		252.0		14.2	14.0	4.0	246.0		5.15	9.0
W9C1S700250	250	5.00		262.0		14.2	14.0	4.0	256.0		5.15	9.0
W9C1S700255	255	5.00		270.0		16.2	16.0	5.0	263.0		5.15	12.0
W9C1S700260	260	5.00		275.0		16.2	16.0	5.0	268.0		5.15	12.0
W9C1S700270	270	5.00		285.0		16.2	16.0	5.0	278.0		5.15	12.0
W9C1S700280	280	5.00		295.0		16.2	16.0	5.0	288.0		5.15	12.0
W9C1S700290	290	5.00	305.0	16.2	16.0	5.0	298.0	5.15	12.0			
W9C1S700300	300	5.00	315.0	16.2	16.0	5.0	308.0	5.15	12.0			

Sizes in BROWN are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

**Note:** All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

**Refer:** ISO 3506-2 Annex F