




WSPS4

SS 316

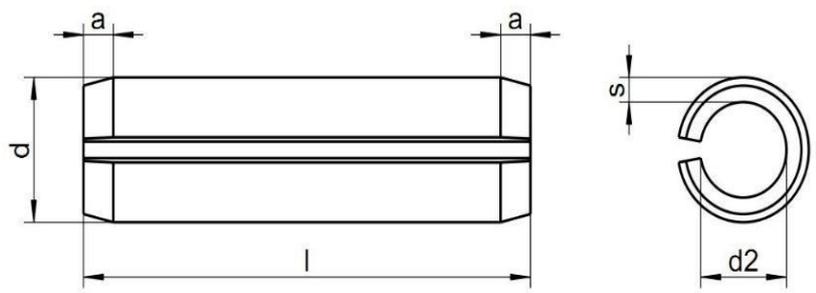

ISO 8752 SPRING DOWEL (slotted pin)

Parameter ↓ Nom Size →		Ø1	Ø1.5	Ø2	Ø2.5	Ø3	Ø3.5
Pin diameter d	min	1.20	1.70	2.30	2.80	3.30	3.80
	max	1.30	1.80	2.40	2.90	3.50	4.00
Recommended Hole size	min	1.00	1.50	2.00	2.50	3.00	3.50
	max	1.10	1.60	2.10	2.60	3.10	3.62
Taper	a	0.15	0.25	0.40	0.40	0.50	0.60
Wall thickness	s	0.20	0.30	0.40	0.50	0.60	0.75
Inside diameter	d2	0.80	1.10	1.50	1.80	2.10	2.30
Length Tolerance →		4mm to 10mm ±0.25mm, 12mm to 50mm ±0.50mm, 55mm to 100mm ±0.75mm					

Quote the item code given below with your order/enquiries.

Dimensions in mm

Size → Length ↓	Ø1	Ø1.5	Ø2	Ø2.5	Ø3	Ø3.5
4	WSPS401004	WSPS410504	WSPS402004	WSPS420504	WSPS403004	WSPS430504
5	WSPS401005	WSPS410505	WSPS402005	WSPS420505	WSPS403005	WSPS430505
6	WSPS401006	WSPS410506	WSPS402006	WSPS420606	WSPS403006	WSPS430506
8	WSPS401008	WSPS410508	WSPS402008	WSPS420508	WSPS403008	WSPS430508
10	WSPS401010	WSPS410510	WSPS410210	WSPS420510	WSPS403010	WSPS430510
12	WSPS401012	WSPS410512	WSPS402012	WSPS420512	WSPS403012	WSPS430512
14	WSPS401014	WSPS410514	WSPS402014	WSPS420514	WSPS403014	WSPS430514
16	WSPS401016	WSPS410516	WSPS402016	WSPS420516	WSPS403016	WSPS430516
18	WSPS401018	WSPS410518	WSPS402018	WSPS420518	WSPS403018	WSPS430518
20	WSPS401020	WSPS410520	WSPS402020	WSPS420520	WSPS403020	WSPS430520
22		WSPS410522	WSPS402022	WSPS420522	WSPS403022	WSPS430522
24			WSPS402024	WSPS420524	WSPS403024	WSPS430524
26			WSPS402026	WSPS420526	WSPS403026	WSPS430526
28			WSPS402028	WSPS420528	WSPS403028	WSPS430528
30			WSPS402030	WSPS420530	WSPS403030	WSPS430530
32					WSPS403032	WSPS430532
36					WSPS403036	WSPS430536
40					WSPS403040	WSPS430540
45					WSPS403045	WSPS430545
50					WSPS403050	WSPS430550

Sizes in BROWN are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative


Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F



WSPS4

SS 316

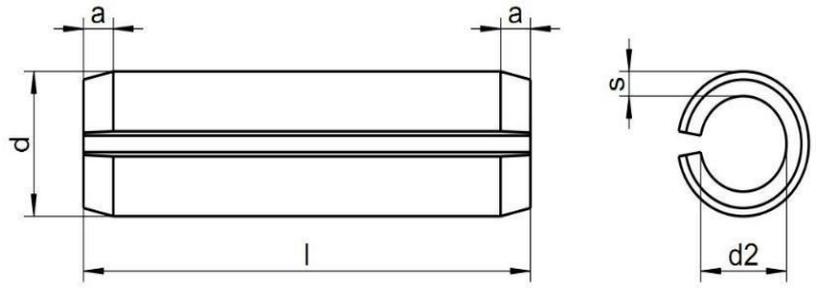

ISO 8752 SPRING DOWEL (slotted pin)

Parameter ↓ Nom Size →		Ø4	Ø4.5	Ø5	Ø6	Ø8	Ø10
Pin diameter d	min	4.40	4.90	5.40	6.40	8.50	10.50
	max	4.60	5.10	5.60	6.70	8.80	10.80
Recommended Hole size	min	4.00	4.50	5.00	6.00	8.00	10.00
	max	4.12	4.62	5.12	6.12	8.15	10.15
Taper	a	0.65	0.80	0.90	1.20	2.00	2.00
Wall thickness	s	0.80	1.00	1.00	1.25	1.50	2.00
Inside diameter	d2	2.80	2.90	3.40	3.90	5.50	6.50
Length Tolerance →		4mm to 10mm ±0.25mm, 12mm to 50mm ±0.50mm, 55mm to 100mm ±0.75mm					

Quote the item code given below with your order/enquiries.

Dimensions in mm

Size → Length ↓	Ø4	Ø4.5	Ø5	Ø6	Ø8	Ø10
4	WSPS404004					
5	WSPS404005	WSPS440505				
6	WSPS404006	WSPS440506	WSPS406006			
8	WSPS404008	WSPS440508	WSPS405008	WSPS406008		
10	WSPS404010	WSPS440510	WSPS405010	WSPS406010	WSPS408010	
12	WSPS404012	WSPS440512	WSPS405012	WSPS406012	WSPS408012	WSPS410012
14	WSPS404014	WSPS440514	WSPS405014	WSPS406014	WSPS408014	WSPS410014
16	WSPS404016	WSPS440516	WSPS405016	WSPS406016	WSPS408016	WSPS410016
18	WSPS404018	WSPS440518	WSPS405018	WSPS406018	WSPS408018	WSPS410018
20	WSPS404020	WSPS440520	WSPS405020	WSPS406020	WSPS408020	WSPS410020
22	WSPS404022	WSPS440522	WSPS405022	WSPS406022	WSPS408022	WSPS410022
24	WSPS404024	WSPS440524	WSPS405024	WSPS406024	WSPS408024	WSPS410024
26	WSPS404026	WSPS440526	WSPS405026	WSPS406026	WSPS408026	WSPS410026
28	WSPS404028	WSPS440528	WSPS405028	WSPS406028	WSPS408028	WSPS410028
30	WSPS404030	WSPS440530	WSPS405030	WSPS406030	WSPS408030	WSPS410030
32	WSPS404032	WSPS440532	WSPS405032	WSPS406032	WSPS408032	WSPS410032
36	WSPS404036	WSPS440536	WSPS405036	WSPS406036	WSPS408036	WSPS410036
40	WSPS404040	WSPS440540	WSPS405040	WSPS406040	WSPS408040	WSPS410040
45	WSPS404045	WSPS440545	WSPS405045	WSPS406045	WSPS408045	WSPS410045
50	WSPS404050	WSPS440550	WSPS405050	WSPS406050	WSPS408050	WSPS410050
55	WSPS404055	WSPS440555	WSPS405055	WSPS406055	WSPS408055	WSPS410055
60	WSPS404060	WSPS440560	WSPS405060	WSPS406060	WSPS408060	WSPS410060
65	WSPS404065	WSPS440565	WSPS405065	WSPS406065	WSPS408065	WSPS410065
70	WSPS404070	WSPS440570	WSPS405070	WSPS406070	WSPS408070	WSPS410070
75	WSPS404075	WSPS440575	WSPS405075	WSPS406075	WSPS408075	WSPS410075
80	WSPS404080	WSPS440580	WSPS405080	WSPS406080	WSPS408080	WSPS410080
85			WSPS405085	WSPS406085	WSPS408085	WSPS410085
90			WSPS405090	WSPS406090	WSPS408090	WSPS410090
95			WSPS405095	WSPS406095	WSPS408095	WSPS410095
100			WSPS405100	WSPS406100	WSPS408100	WSPS410100
120				WSPS406120	WSPS408120	WSPS410120

Sizes in BROWN are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F