




WA3THS4

SS - 316

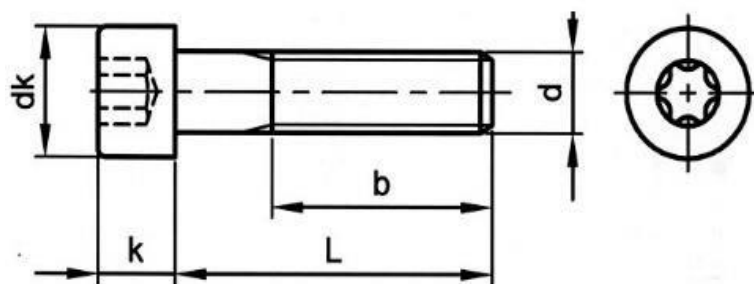

ISO 14579 SOCKET HEAD CAP SCREW 6 LOBE (Torx) Partially Threaded

Size d → Parameter ↓	M2.5x0.45	M3x0.5	M4x0.7	M5x0.8	M6x1.0	M8x1.25	M10x1.5
dk Max	4.50	5.50	7.00	8.50	10.00	13.00	16.00
dk Min	4.32	5.32	6.78	8.28	9.78	12.73	15.73
k Max	2.50	3.00	4.00	5.00	6.00	8.00	10.00
k Min	2.36	2.86	3.82	4.82	5.70	7.64	9.64
Thread length b (ref)	17.00	18.00	20.00	22.00	24.00	28.00	32.00
Drive Bit	T8	T10	T20	T25	T30	T40	T50

Quote the item code given below with your order/enquiries.

Dimensions in mm

Dia d → Length ↓	M2.5x0.45	M3x0.5	M4x0.7	M5x0.8	M6x1.0	M8x1.25	M10x1.5
25	WA3THS420525	WA3THS403025					
30	WA3THS420530	WA3THS403030	WA3THS404030	WA3THS405030			
35	WA3THS420535	WA3THS403035	WA3THS404035	WA3THS405035	WA3THS406035		
40	WA3THS403040	WA3THS403040	WA3THS404040	WA3THS405040	WA3THS406040	WA3THS408040	
45		WA3THS403045	WA3THS404045	WA3THS405045	WA3THS406045	WA3THS408045	WA3THS410045
50		WA3THS403050	WA3THS404050	WA3THS405050	WA3THS406050	WA3THS408050	WA3THS410050
55		WA3THS403055	WA3THS404055	WA3THS405055	WA3THS406055	WA3THS408055	WA3THS410055
60		WA3THS403060	WA3THS404060	WA3THS405060	WA3THS406060	WA3THS408060	WA3THS410060
65			WA3THS404065	WA3THS405065	WA3THS406065	WA3THS408065	WA3THS410065
70			WA3THS404070	WA3THS405070	WA3THS406070	WA3THS408070	WA3THS410070
75			WA3THS404075	WA3THS405075	WA3THS406075	WA3THS408075	WA3THS410075
80			WA3THS404080	WA3THS405080	WA3THS406080	WA3THS408080	WA3THS410080
90				WA3THS405090	WA3THS406090	WA3THS408090	WA3THS410090
100				WA3THS405100	WA3THS406100	WA3THS408100	WA3THS410100
120					WA3THS406120	WA3THS408120	WA3THS410120
130						WA3THS408130	WA3THS410130
150						WA3THS408150	WA3THS410150

Sizes in BROWN are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.**Refer:** ISO 3506-2 Annex F