




7019386466

WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

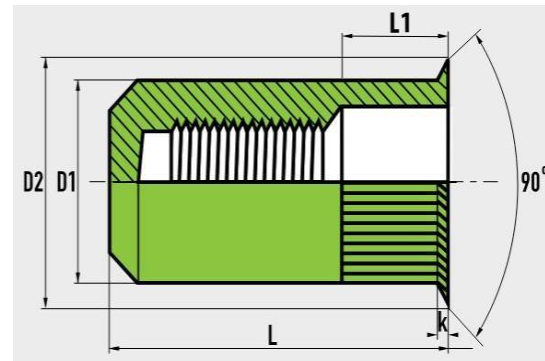

W2NCRS2
SS 304

BLIND RIVET NUT CLOSED Type [Small Countersunk(RCSK)]

Quote the item code given below with your order/enquiries.

Dimensions in mm

Thread Size	Part No	Grip Range	Hole Size	D1 Body Dia	D2	L	k	Pull-In	Maximum Torque
Dia					Collar Dia	Body Length	Collar Thickness		
M3x0.5 1GR	W2NCRS203001	0.5 - 2.5 mm	5.0 mm	4.9	6.0	15.5	0.8	3500 N	1.0 Nm
M4x0.7 1GR	W2NCRS204001	0.5 - 3.0 mm	6.0 mm	5.9	7.0	16.5	0.8	6000 N	2.8 Nm
M5x0.8 1GR	W2NCRS205001	0.5 - 3.0 mm	7.0 mm	6.9	8.0	19.0	0.8	10000 N	6.0 Nm
M6x1.0 1GR	W2NCRS206001	0.5 - 3.0 mm	9.0 mm	8.9	10.0	22.0	0.8	15000 N	10.0 Nm
M8x1.25 1GR	W2NCRS208001	0.5 - 3.0 mm	11.0 mm	10.9	12.0	25.0	0.8	27000 N	24.0 Nm
M10x1.5 1GR	W2NCRS210001	0.8 - 3.5 mm	13.0 mm	12.9	14.5	30.0	1.0	37000 N	48.0 Nm
M12x1.75 1GR	W2NCRS212001	0.8 - 4.0 mm	16.0 mm	15.9	17.6	31.5	1.0	48000 N	68.0 Nm

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F