




7019386466

WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

W2NC3RS2 SS 304

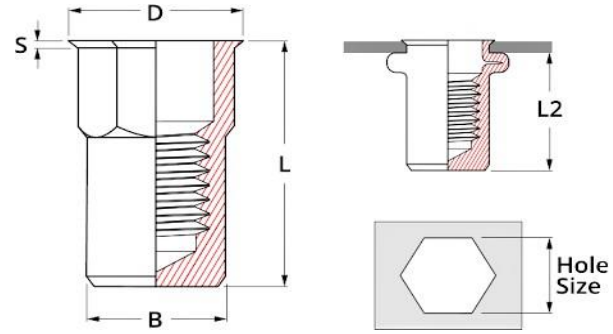

BLIND RIVET NUT Closed Type [Semi-Hexagonal Knurled Reduced CSK]

Quote the item code given below with your order/enquiries.

Dimensions in mm

Thread Size	Part No	Grip Range	Hole Size Hex	Body Dia B	D	L	S	Pull-In	Maximum Torque
Dia					Collar Dia	Body Length	Collar Thickness		
M3x0.5 1GR	W2NC3RS203001	0.3-2.5 mm	5.0 mm	4.9	6.0	15.5	0.6	4000 N	1.2 Nm
M4x0.7 1GR	W2NC3RS204001	0.5-3.0 mm	6.0 mm	5.9	7.0	16.5	0.8	6800 N	3.0 Nm
M5x0.8 1GR	W2NC3RS205001	0.5-3.0 mm	7.0 mm	6.9	8.0	19.0	0.8	10000 N	6.0 Nm
M6x1.0 1GR	W2NC3RS206001	0.5-3.0 mm	9.0 mm	8.9	10.0	22.0	0.8	15000 N	10.0 Nm
M8x1.25 1GR	W2NC3RS208001	0.5-3.0 mm	11.0 mm	10.9	12.0	25.0	0.8	27000 N	24.0 Nm
M10x1.5 1GR	W2NC3RS210001	0.8-3.5 mm	13.0 mm	12.9	14.5	30.0	1.0	37000 N	48.0 Nm
M12x1.75 1GR	W2NC3RS212001	1.0-4.0 mm	16.0 mm	12.9	17.6	31.5	1.0	54000 N	82.0 Nm

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.
Refer: ISO 3506-2 Annex F