



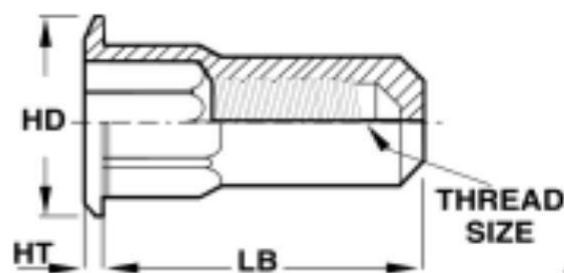

WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

W2NC3S2
SS 304

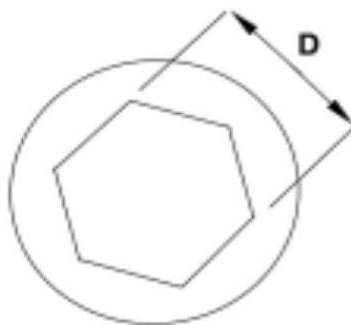

BLIND RIVET NUT CLOSED Type [Semi-Hexagonal Knurled Large Flange]

Quote the item code given below with your order/enquiries.

Dimensions in mm

Thread Size	Part No	Grip Range	D	Body Dia	HD	LB	HT	Pull-In	Maximum Torque
Dia			Hole Size Hex		Collar Dia	Body Length	Collar Thickness		
M3x0.5 1GR	W2NC3S203001	0.5-2.5 mm	5.0 mm	4.9	8.0	15.5	0.8	3500 N	1.2 Nm
M4x0.7 1GR	W2NC3S204001	0.5-3.0 mm	6.0 mm	5.9	9.3	16.5	1.0	6000 N	3.0 Nm
M5x0.8 1GR	W2NC3S205001	0.5-3.0 mm	7.0 mm	6.9	10.3	10.0	1.0	9000 N	6.0 Nm
M6x1.0 1GR	W2NC3S206001	0.5-3.0 mm	9.0 mm	8.9	12.3	22.0	1.5	14000 N	10.0 Nm
M8x1.25 1GR	W2NC3S208001	0.5-3.0 mm	11.0 mm	10.9	14.3	26.5	1.5	25000 N	22.0 Nm
M10x1.5 1GR	W2NC3S210001	0.5-3.0 mm	13.0 mm	12.9	16.3	28.5	2.0	35000 N	44.0 Nm
M12x1.75 1GR	W2NC3S212001	1.0-4.0 mm	16.0 mm	15.9	23.0	33.5	2.0	50000 N	78.0 Nm

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F