




WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

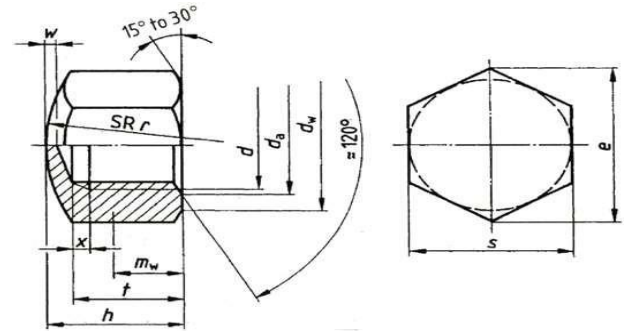

W6CNS2 AISI 304

DIN 917 HEX CAP NUT

Quote the item code given below with your order/enquiries.

Dimensions in mm

Parameter↓SIZE→	M3 x 0.5	M4 x 0.7	M5 x 0.8	M6 x 1.0	M8 x 1.25	M10 x 1.5	M12 x 1.75	M14 x 2.0
Item Code	W6CNS203000	W6CNS204000	W6CNS205000	W6CNS206000	W6CNS208000	W6CNS210000	W6CNS212000	W6CNS214000
Width A/F s	5.50	7.00	8.00	10.00	13.00	17.00	19.00	22.00
Width A/C e min	6.01	7.66	8.79	11.05	14.38	18.90	21.10	24.49
hole depth t max	3.46	4.64	5.44	7.29	9.79	11.35	13.85	15.35
hole depth t min	3.00	4.16	4.96	6.71	9.21	10.65	13.15	14.65
Nut Height h max	5.00	5.50	7.00	9.00	12.00	14.00	16.00	18.00
Nut Height h min	4.70	5.20	6.64	8.64	11.57	13.57	15.57	17.57
Wrenching ht mw min	2.10	2.80	3.50	4.50	6.00	7.00	8.00	9.00
Dome thickness w	1.00	1.00	1.00	1.50	2.00	2.00	2.00	2.00
Dome Radius r	6.00	8.00	10.00	12.00	15.00	20.00	25.00	28.00

Parameter↓SIZE→	M16 x 2.0	M18 x 2.5	M20 x 2.5	M22 x 2.5	M24 x 3.0	M27 x 3.0	M30 x 3.5
Item Code	W6CNS216000	W6CNS218000	W6CNS220000	W6CNS222000	W6CNS224000	W6CNS227000	W6CNS230000
Width A/F s	24.00	27.00	30.00	32.00	36.00	41.00	46.00
Width A/C e min	26.75	29.56	32.95	35.03	39.55	45.20	50.85
hole depth t max	17.35	19.42	21.42	22.42	24.42	26.42	28.42
hole depth t min	16.65	18.58	20.58	21.58	23.58	25.58	27.58
Nut Height h max	20.00	22.00	25.00	28.00	30.00	32.00	34.00
Nut Height h max	19.48	21.48	24.48	27.48	29.48	31.38	33.38
Wrenching ht mw min	10.00	11.00	12.50	14.00	15.00	16.00	17.00
Dome thickness w	2.00	2.00	2.50	3.00	3.00	3.00	3.00
Dome Radius r	30.00	32.00	35.00	35.00	40.00	50.00	60.00

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F