




WSPS7
SPRING STEEL

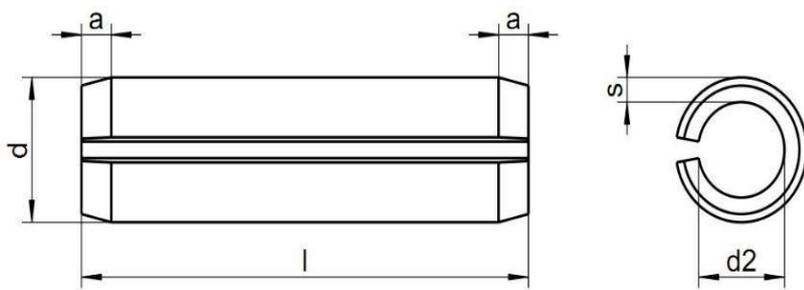

ISO 8752 SPRING DOWEL (slotted pin)

Parameter↓ Nom Size→		Ø1	Ø1.5	Ø2	Ø2.5	Ø3	Ø3.5
Pin diameter d	min	1.20	1.70	2.30	2.80	3.30	3.80
	max	1.30	1.80	2.40	2.90	3.50	4.00
Recommended Hole size	min	1.00	1.50	2.00	2.50	3.00	3.50
	max	1.10	1.60	2.10	2.60	3.10	3.62
Taper	a	0.15	0.25	0.40	0.40	0.50	0.60
Wall thickness	s	0.20	0.30	0.40	0.50	0.60	0.75
Inside diameter	d2	0.80	1.10	1.50	1.80	2.10	2.30
Length Tolerance →		4mm to 10mm ±0.50mm, 12mm to 50mm ±1.0mm, 55mm to 100mm ±1.5mm					

Quote the item code given below with your order/enquiries.

Dimensions in mm

Size→ Length↓	Ø1	Ø1.5	Ø2	Ø2.5	Ø3	Ø3.5
4	WSPS701004	WSPS710504	WSPS702004	WSPS720504	WSPS703004	WSPS730504
5	WSPS701005	WSPS710505	WSPS702005	WSPS720505	WSPS703005	WSPS730505
6	WSPS701006	WSPS710506	WSPS702006	WSPS720606	WSPS703006	WSPS730506
8	WSPS701008	WSPS710508	WSPS702008	WSPS720508	WSPS703008	WSPS730508
10	WSPS701010	WSPS710510	WSPS710210	WSPS720510	WSPS703010	WSPS730510
12	WSPS701012	WSPS7105012	WSPS702012	WSPS720512	WSPS703012	WSPS730512
14	WSPS701014	WSPS7105014	WSPS702014	WSPS720514	WSPS703014	WSPS730514
16	WSPS701016	WSPS7105016	WSPS702016	WSPS720516	WSPS703016	WSPS730516
18	WSPS701018	WSPS7105018	WSPS702018	WSPS720518	WSPS703018	WSPS730518
20	WSPS701020	WSPS7105020	WSPS702020	WSPS720520	WSPS703020	WSPS730520
22		WSPS7105022	WSPS702022	WSPS720522	WSPS703022	WSPS730522
24			WSPS702024	WSPS720524	WSPS703024	WSPS730524
26			WSPS702026	WSPS720526	WSPS703026	WSPS730526
28			WSPS702028	WSPS720528	WSPS703028	WSPS730528
30			WSPS702030	WSPS720530	WSPS703030	WSPS730530
32					WSPS703032	WSPS730532
36					WSPS703036	WSPS730536
40					WSPS703040	WSPS730540
45					WSPS703045	WSPS730545
50					WSPS703050	WSPS730550

Sizes in BROWN are non-preferred. Availability is limited and MOQ is higher.


Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F



WSPS7
SPRING STEEL

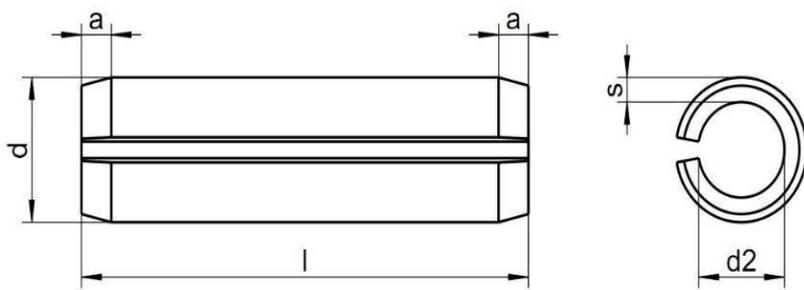

ISO 8752 SPRING DOWEL (slotted pin)

Parameter ↓ Nom Size →		Ø4	Ø4.5	Ø5	Ø6	Ø8	Ø10
Pin diameter d	min	4.40	4.90	5.40	6.40	8.50	10.50
	max	4.60	5.10	5.60	6.70	8.80	10.80
Recommended Hole size	min	4.00	4.50	5.00	6.00	8.00	10.00
	max	4.12	4.62	5.12	6.12	8.15	10.15
Taper	a	0.65	0.80	0.90	1.20	2.00	2.00
Wall thickness	s	0.80	1.00	1.00	1.25	1.50	2.00
Inside diameter	d2	2.80	2.90	3.40	3.90	5.50	6.50
Length Tolerance →		4mm to 10mm ±0.50mm, 12mm to 50mm ±1.0mm, 55mm to 100mm ±1.5mm,					

Quote the item code given below with your order/enquiries.

Dimensions in mm

Size → Length ↓	Ø4	Ø4.5	Ø5	Ø6	Ø8	Ø10
4	WSPS704004	WSPS740504	WSPS705004	WSPS706004	WSPS708004	WSPS710004
5	WSPS704005	WSPS740505	WSPS705005	WSPS706005	WSPS708008	WSPS710010
6	WSPS704006	WSPS740506	WSPS706006	WSPS706006	WSPS708006	WSPS710006
8	WSPS704008	WSPS740508	WSPS705008	WSPS706008	WSPS708008	WSPS710010
10	WSPS704010	WSPS740510	WSPS705010	WSPS706010	WSPS708010	WSPS710010
12	WSPS704012	WSPS740512	WSPS705012	WSPS706012	WSPS708012	WSPS710010
14	WSPS704014	WSPS740514	WSPS705014	WSPS706014	WSPS708014	WSPS710014
16	WSPS704016	WSPS740516	WSPS705016	WSPS706016	WSPS708016	WSPS710016
18	WSPS704018	WSPS740518	WSPS705018	WSPS706018	WSPS708018	WSPS710018
20	WSPS704020	WSPS740520	WSPS705020	WSPS706020	WSPS708020	WSPS710020
22	WSPS704022	WSPS740522	WSPS705022	WSPS706022	WSPS708022	WSPS710022
24	WSPS704024	WSPS740524	WSPS705024	WSPS706024	WSPS708024	WSPS710024
26	WSPS704026	WSPS740526	WSPS705026	WSPS706026	WSPS708026	WSPS710026
28	WSPS704028	WSPS740528	WSPS705028	WSPS706028	WSPS708028	WSPS710028
30	WSPS704030	WSPS740530	WSPS705030	WSPS706030	WSPS708030	WSPS710030
32	WSPS704032	WSPS740532	WSPS705032	WSPS706032	WSPS708032	WSPS710032
36	WSPS704036	WSPS740536	WSPS705036	WSPS706036	WSPS708036	WSPS710036
40	WSPS704040	WSPS740540	WSPS705040	WSPS706040	WSPS708040	WSPS710040
45	WSPS704045	WSPS740545	WSPS705045	WSPS706045	WSPS708045	WSPS710040
50	WSPS704050	WSPS740550	WSPS705050	WSPS706050	WSPS708050	WSPS710050
55	WSPS704055	WSPS740555	WSPS705055	WSPS706055	WSPS708055	WSPS710050
60	WSPS704060	WSPS740560	WSPS705060	WSPS706060	WSPS708060	WSPS710060
65	WSPS704065	WSPS740565	WSPS705065	WSPS706065	WSPS708065	WSPS710065
70	WSPS704070	WSPS740570	WSPS705070	WSPS706070	WSPS708070	WSPS710070
75	WSPS704075	WSPS740575	WSPS705075	WSPS706075	WSPS708075	WSPS710075
80	WSPS704080	WSPS740580	WSPS705080	WSPS706080	WSPS708080	WSPS710080
85			WSPS705085	WSPS706085	WSPS708085	WSPS710085
90			WSPS705090	WSPS706090	WSPS708090	WSPS710090
95			WSPS705095	WSPS706095	WSPS708095	WSPS710095
100			WSPS705100	WSPS706100	WSPS708100	WSPS710100
120				WSPS706120	WSPS708120	WSPS710120

Sizes in BROWN are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F