





WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

7019386466

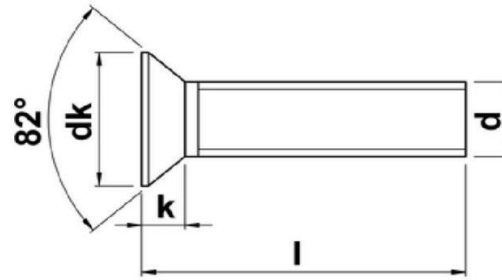

WKXuS2

SS 304

ASME B 18.6.3 CSK PHILLIPS UNC Series

Size→	#2-56	#4-40	#6-32	#8-32	#10-24	#12-24	1/4"-20
Screw dia d	0.086 (2.18 mm)	0.112 (2.84 mm)	0.138 (3.51 mm)	0.164 (4.17 mm)	0.190 (4.83 mm)	0.216 (5.49 mm)	0.250 (6.35 mm)
Head Dia dk	min 0.144	0.191	0.238	0.285	0.333	0.380	0.442
	max 0.162	0.212	0.262	0.312	0.362	0.412	0.477
Head Ht k, Ref	0.051	0.067	0.083	0.100	0.116	0.132	0.153
Recess dia m Ref	0.096	0.122	0.168	0.182	0.198	0.262	0.276
Driver size	1	1	2	2	2	3	3

Thread Class - 2A

Quote the item code given below with your order/ inquiries:

Dimensions in mm

Length ↓Size→	#2-56	#4-40	#6-32	#8-32	#10-24	#12-24	1/4"-20
3/16"	WKXuS225648	WKXuS244048					
1/4"	WKXuS225662	WKXuS244062	WKXuS263262				
5/16"	WKXuS225679	WKXuS244079	WKXuS263279	WKXuS283279	WKXuS212479	WKXuS222479	WKXuS262079
3/8"	WKXuS225691	WKXuS244091	WKXuS263291	WKXuS283291	WKXuS212491	WKXuS222491	WKXuS262091
1/2"	WKXuS225613	WKXuS244013	WKXuS263213	WKXuS283213	WKXuS212413	WKXuS222413	WKXuS262013
5/8"	WKXuS225615	WKXuS244015	WKXuS263215	WKXuS283215	WKXuS212415	WKXuS222415	WKXuS262015
3/4"	WKXuS225619	WKXuS244019	WKXuS263219	WKXuS283219	WKXuS212419	WKXuS222419	WKXuS262019
7/8"	WKXuS225623	WKXuS244023	WKXuS263223	WKXuS283223	WKXuS212423	WKXuS222423	WKXuS262023
1"	WKXuS225625	WKXuS244025	WKXuS263225	WKXuS283225	WKXuS212425	WKXuS222425	WKXuS262025
1 1/8"		WKXuS244028	WKXuS263228	WKXuS283228	WKXuS212428	WKXuS222428	WKXuS262028
1 1/4"		WKXuS244031	WKXuS263231	WKXuS283231	WKXuS212431	WKXuS222431	WKXuS262031
1 1/2"		WKXuS244038	WKXuS263238	WKXuS283238	WKXuS212438	WKXuS222438	WKXuS262038
1 5/8"		WKXuS244041	WKXuS263241	WKXuS283241	WKXuS212441	WKXuS222441	WKXuS262041
1 3/4"		WKXuS244044	WKXuS263244	WKXuS283244	WKXuS212444	WKXuS222444	WKXuS262044
2"		WKXuS244051	WKXuS263251	WKXuS283251	WKXuS212451	WKXuS222451	WKXuS262051

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative.

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F