**WA3LS4****SS - 316****DIN 7984 ALLEN CAP Low Head**

Note: Head may be plain or Knurled

Dimension↓ Size→	M3x0.5	M4x0.7	M5x0.8	M6x1.0	M8x1.25	M10x1.5
dk max	5.50	7.00	8.50	10.00	13.00	16.00
dk min	5.32	6.78	8.28	9.78	12.73	15.73
s	2.00	2.50	3.00	4.00	5.00	7.00
k max	2.00	2.80	3.50	4.00	5.00	6.00
k min	1.86	2.66	3.32	3.82	4.82	5.82
t	1.50	2.30	2.70	3.00	3.80	4.50
b min	12	14	16	18	22	26

Quote the item code given below with your order/enquiries.

Dimensions in mm

Length↓ Size→	M3x0.5	M4x0.7	M5x0.8	M6x1.0	M8x1.25	M10x1.5
3	WA3LS403003					
4	WA3LS403004	WA3LS404004				
5	WA3LS403005	WA3LS404005	WA3LS405005			
6	WA3LS403006	WA3LS404006	WA3LS405006	WA3LS406006		
8	WA3LS403008	WA3LS404008	WA3LS405008	WA3LS406008	WA3LS408008	
10	WA3LS403010	WA3LS404010	WA3LS405010	WA3LS406010	WA3LS408010	WA3LS410010
12	WA3LS403012	WA3LS404012	WA3LS405012	WA3LS406012	WA3LS408012	WA3LS410012
14	WA3LS403014	WA3LS404014	WA3LS405014	WA3LS406014	WA3LS408014	WA3LS410014
16	WA3LS403016	WA3LS404016	WA3LS405016	WA3LS406016	WA3LS408016	WA3LS410016
18	WA3LS403018	WA3LS404018	WA3LS405018	WA3LS406018	WA3LS408018	WA3LS410018
20	WA3LS403020	WA3LS404020	WA3LS405020	WA3LS406020	WA3LS408020	WA3LS410020
22	WA3LS403022	WA3LS404022	WA3LS405022	WA3LS406022	WA3LS408022	WA3LS410022
25	WA3LS403025	WA3LS404025	WA3LS405025	WA3LS406025	WA3LS408025	WA3LS410025
30	WA3LS403030	WA3LS404030	WA3LS405030	WA3LS406030	WA3LS408030	WA3LS410030
35	WA3LS403035	WA3LS404035	WA3LS405035	WA3LS406035	WA3LS408035	WA3LS410035
40	WA3LS403040	WA3LS404040	WA3LS405040	WA3LS406040	WA3LS408040	WA3LS410040
45	WA3LS403045	WA3LS404045	WA3LS405045	WA3LS406045	WA3LS408045	WA3LS410045
50	WA3LS403050	WA3LS404050	WA3LS405050	WA3LS406050	WA3LS408050	WA3LS410050
55		WA3LS404055	WA3LS405055	WA3LS406055	WA3LS408055	WA3LS410055
60		WA3LS404060	WA3LS405060	WA3LS406060	WA3LS408060	WA3LS410060
65			WA3LS405065	WA3LS406065	WA3LS408065	WA3LS410065
70			WA3LS405070	WA3LS406070	WA3LS408070	WA3LS410070
75			WA3LS405075	WA3LS406075	WA3LS408075	WA3LS410075
80			WA3LS405080	WA3LS406080	WA3LS408080	WA3LS410080
90				WA3LS406090	WA3LS408090	WA3LS410090
100				WA3LS406100	WA3LS408100	WA3LS410100
110				WA3LS406110	WA3LS408110	WA3LS410110
120				WA3LS406120	WA3LS408120	WA3LS410120

Parts above the thick line are Fully Threaded. For thread length of sizes below this line refer dimension b

Sizes in BROWN are non-preferred. Availability is limited and MOQ is higher.


Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.**Refer:** ISO 3506-2 Annex F



WA3LS4

SS - 316

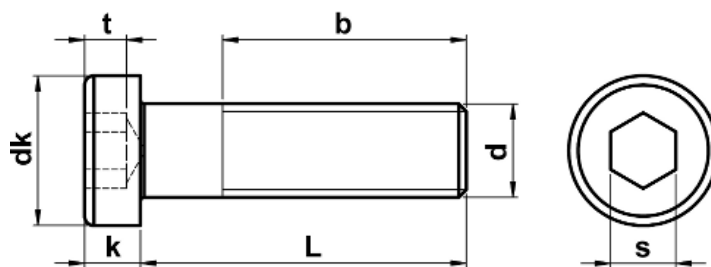

DIN 7984 ALLEN CAP Low Head

Note: Head may be plain or Knurled

Dimension↓Size→	M12x1.75	M14x2.0	M16x2.0	M18x2.0	M20x2.5	M24x3.0
dk max	18.00	21.00	24.00	27.00	30.00	36.00
dk min	17.73	20.67	23.67	26.67	29.67	35.61
s	8.00	10.00	12.00	12.00	14.00	17.00
k max	7.00	8.00	9.00	10.00	11.00	13.00
k min	6.78	7.78	8.78	9.78	10.73	12.73
t	5.00	5.30	5.50	6.50	7.50	8.00
b min	30	34	38	42	46	54

Quote the item code given below with your order/enquiries.

Dimensions in mm

Length↓Size→	M12x1.75	M14x2.0	M16x2.0	M18x2.0	M20x2.5	M24x3.0
16	WA3LS412016					
18	WA3LS412018					
20	WA3LS412020	WA3LS414020	WA3LS416020			
22	WA3LS412022	WA3LS414022	WA3LS416022			
25	WA3LS412025	WA3LS414025	WA3LS416025			
30	WA3LS412030	WA3LS414030	WA3LS416030	WA3LS418030	WA3LS420030	
35	WA3LS412035	WA3LS414035	WA3LS416035	WA3LS418035	WA3LS420035	
40	WA3LS412040	WA3LS414040	WA3LS416040	WA3LS418040	WA3LS420040	WA3LS424040
45	WA3LS412045	WA3LS414045	WA3LS416045	WA3LS418045	WA3LS420045	WA3LS424045
50	WA3LS412050	WA3LS414050	WA3LS416050	WA3LS418050	WA3LS420050	WA3LS424050
55	WA3LS412055	WA3LS414055	WA3LS416055	WA3LS418055	WA3LS420055	WA3LS424055
60	WA3LS412060	WA3LS414060	WA3LS416060	WA3LS418060	WA3LS420060	WA3LS424060
65	WA3LS412065	WA3LS414065	WA3LS416065	WA3LS418065	WA3LS420065	WA3LS424065
70	WA3LS412070	WA3LS414070	WA3LS416070	WA3LS418070	WA3LS420070	WA3LS424070
75	WA3LS412075	WA3LS414075	WA3LS416075	WA3LS418075	WA3LS420075	WA3LS424075
80	WA3LS412080	WA3LS414080	WA3LS416080	WA3LS418080	WA3LS420080	WA3LS424080
90	WA3LS412090	WA3LS414090	WA3LS416090	WA3LS418090	WA3LS420090	WA3LS424090
100	WA3LS412100	WA3LS414100	WA3LS416100	WA3LS418100	WA3LS420100	WA3LS424100
110	WA3LS412110	WA3LS414110	WA3LS416110	WA3LS418110	WA3LS420110	WA3LS424110
120	WA3LS412120	WA3LS414120	WA3LS416120	WA3LS418120	WA3LS420120	WA3LS424120
130	WA3LS412130		WA3LS416130		WA3LS420130	WA3LS424130
140	WA3LS412140		WA3LS416140		WA3LS420140	WA3LS424140
150	WA3LS412150		WA3LS416150		WA3LS420150	WA3LS424150

Parts above the thick line are Fully Threaded. For thread length of sizes below this line refer dimension b

Sizes in BROWN are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.**Refer:** ISO 3506-2 Annex F