




7019386466

WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

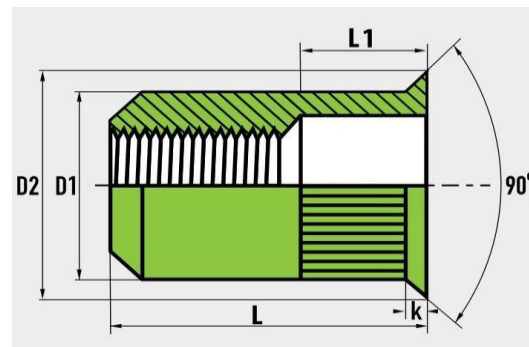

W2NOKS2 SS 304

BLIND RIVRT NUT OPEN [Round Shank Knurled CSK Head]

Quote the item code given below with your order/enquiries.

Dimensions in mm

Thread Size	Part No	Grip Range	Hole Size	D1 Body Dia	D2	L	k	Pull-In	Maximum Torque
Dia					Collar Dia	Body Length	Collar Thickness		
M3x0.5 1GR	W2NOKS203001	1.5-2.5 mm	4.9 mm	4.8	8.0	9.0	1.7	4000 N	1.2 Nm
M4x0.7 1GR	W2NOKS204001	1.5-3.5 mm	6.0 mm	5.9	9.0	11.5	1.7	6800 N	3.0 Nm
M5x0.8 1GR	W2NOKS205001	1.5-4.0 mm	7.0 mm	6.9	10.0	13.5	1.7	10000 N	6.0 Nm
M6x1.0 1GR	W2NOKS206001	1.5-4.5 mm	9.0 mm	8.9	12.0	16.0	1.7	15000 N	10.0 Nm
M8x1.25 1GR	W2NOKS208001	1.5-4.5 mm	11.0 mm	10.9	14.0	19.0	1.7	27000 N	24.0 Nm
M10x1.5 1GR	W2NOKS210001	1.5-4.5 mm	13.0 mm	12.9	16.0	21.0	1.7	37000 N	48.0 Nm
M12x1.75 1GR	W2NOKS212001	1.7-4.5 mm	15.0 mm	14.9	18.0	24.0	1.7	54000 N	82.0 Nm

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F