




WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

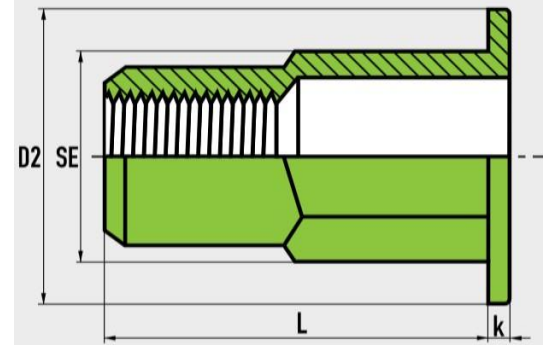

W2NO3S2 SS 304

BLIND RIVET NUT OPEN Type [Semi-Hexagonal Shank Large Flange]

Quote the item code given below with your order/enquiries.

Dimensions in mm

Thread Size	Part No	Grip Range	SW1	Body Dia SW	D2	L	k	Pull-In	Maximum Torque
Dia			Hole Size Hex	Across Flat	Collar Dia	Body Length	Collar Thickness		
M3x0.5 1GR	W2NO3S203001	0.3-1.5 mm	5.1 mm	5.0	8.0	9.0	0.85	3200 N	1.5 Nm
M4x0.7 1GR	W2NO3S204001	0.5-2.5 mm	6.1 mm	6.0	9.3	11.5	1.0	6800 N	3.0 Nm
M5x0.8 1GR	W2NO3S205001	0.5-3.0 mm	7.1 mm	7.0	10.3	13.5	1.0	10000 N	6.0 Nm
M6x1.0 1GR	W2NO3S206001	0.5-3.0 mm	9.1 mm	9.0	12.3	15.5	1.5	15000 N	10.0 Nm
M8x1.25 1GR	W2NO3S208001	0.5-3.0 mm	11.1 mm	11.0	14.3	17.5	1.5	27000 N	24.0 Nm
M10x1.5 1GR	W2NO3S210001	1.0-4.0 mm	13.1 mm	13.0	16.3	22.0	2	37000 N	48.0 Nm
M12x1.75 1GR	W2NO3S212001	1.0-4.0 mm	13.1 mm	16.0	23.0	26.0	2.0	37000 N	48.0 Nm

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F