




7019386466

WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

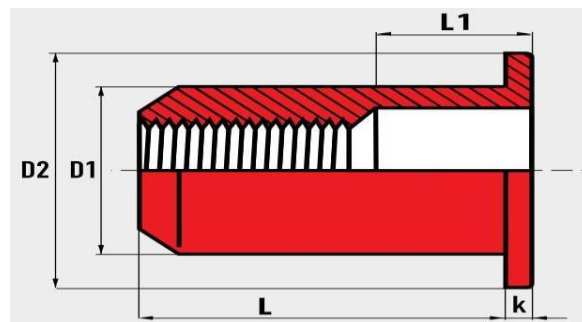

W2NOFS4 SS 316

BLIND RIVET NUT OPEN [Round Shank Knurled Large Flange]

Quote the item code given below with your order/enquiries.

Dimensions in mm

Thread Size	Part No	Grip Range	Hole Size	D1 Body Dia	D2	L	k	Pull-In	Maximum Torque
Dia					Collar Dia	Body Length	Collar Thickness		
M3x0.5 1GR	W2NOFS403001	0.5-2.0 mm	5.0 mm	4.9	7.0	10.0	0.9	4000 N	1.2 Nm
M4x0.7 1GR	W2NOFS404001	0.5-3.0 mm	6.0 mm	5.9	9.0	10.0	1.0	6800N	3.0 Nm
M4x0.7 2GR	W2NOFS404002	3.0-4.5 mm				11.5			
M5x0.8 1GR	W2NOFS405001	0.5-3.0 mm	7.0 mm	6.9	10.0	12.0	1.0	10000 N	6.0 Nm
M5x0.8 2GR	W2NOFS405002	3.0-4.5 mm				15.0			
M6x1.0 1GR	W2NOFS406001	0.5-3.0 mm	9.0 mm	8.9	13.0	14.5	1.5	15000 N	10.0 Nm
M6x1.0 2GR	W2NOFS406002	3.0-5.0 mm				16.0			
M8x1.25 1GR	W2NOFS408001	0.5-3.0 mm	11.0 mm	10.9	16.0	16.0	1.5	27000 N	24.0 Nm
M8x1.25 2GR	W2NOFS408002	3.0 -5.5 mm				18.5			
M10x1.5 1GR	W2NOFS410001	0.5-3.0 mm	13.0 mm	12.9	19.0	17.0	2.0	37000 N	48.0 Nm
M10x1.5 2GR	W2NOFS410002	3.0-6.0 mm				22.0			
M12x1.75 1GR	W2NOFS412001	1.0-4.0 mm	16.0 mm	15.9	23.0	23.0	2.0	54000 N	82.0 Nm

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F