




WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

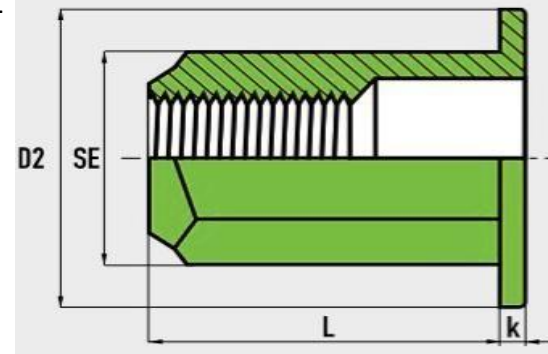

W2NO6S2 SS 304

BLIND RIVET NUT OPEN Type [Hexagonal Shank Large Flange]

Quote the item code given below with your order/enquiries.

Dimensions in mm

Thread Size	Part No	Grip Range	SW1	D2	SE	L	SW	k	Pull-In	Maximum Torque
Dia			Hole Size Hex	Collar Dia	Across Corners	Body Length	Across Flat	Collar Thickness		
M4x0.7 1GR	W2NO6S204001	0.5-3.0 mm	6.1 mm	9.2	6.8	11.1	6.0	1.0	6800 N	3.0 Nm
M5x0.8 1GR	W2NO6S205001	0.5-3.0 mm	7.1 mm	10.2	7.9	13.1	7.0	1.0	10000 N	6.0 Nm
M5x0.8 2GR	W2NO6S205002	3.0-5.5 mm				15.0				
M6x1.0 1GR	W2NO6S206001	0.5-3.0 mm	9.1 mm	12.6	10.2	15.1	9.0	1.5	15000 N	10.0 Nm
M6x1.0 2GR	W2NO6S206002	3.0-5.5 mm				17.0				
M8x1.25 1GR	W2NO6S208001	0.5-3.0 mm	11.1 mm	15.8	12.4	17.0	11.0	1.5	27000 N	24.0 Nm
M8x1.25 2GR	W2NO6S208002	3.0-5.5 mm				19.0				
M10x1.5 1GR	W2NO6S210001	1.0-4.0 mm	13.1 mm	18.2	14.7	21.0	13.0	2.0	37000 N	48.0 Nm
M10x1.5 2GR	W2NO6S210002	4.0-6.0 mm				23.0				
M12x1.75 1GR	W2NO6S212001	1.0-4.0 mm	16.1 mm	19.3	18.1	25.5	16.0	2.0	54000 N	82.0 Nm

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F