




WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

W20S2

SS 304

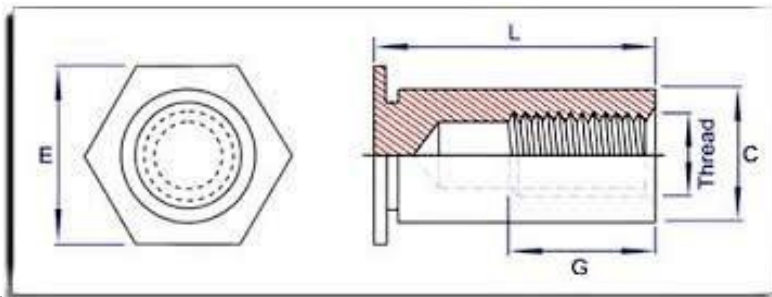

BLIND STANDOFF BSOS

Size		M2x0.4	M2.5x0.45	M3x0.5	3.5M3x0.5	M3.5x0.6	M4x0.7	M5x0.8
C		4.20	4.20	4.20	5.39	5.39	7.12	7.12
E		4.80	4.80	4.80	6.40	6.40	7.90	7.90
Hole in Sheet +0.08		4.22	4.22	4.22	5.41	5.41	7.14	7.14
Min sheet thickness		1.02	1.02	1.02	1.02	1.02	1.27	1.27
Min Hole C/L to edge		6.00	6.00	6.00	6.80	6.80	8.00	8.00
Max tightening torque for mating screw Nm		0.20	0.20	0.40	0.40	0.70	1.40	2.60
Installation KN	5052-H34 AL	4.80	4.80	4.80	7.50	7.50	10.60	10.60
	Cold Rolled Sheet	9.60	9.60	9.60	14.50	14.50	17.60	17.60
Pushout N	5052-H34 AL	700	700	700	1300	1300	1750	1750
	Cold Rolled Sheet	1000	1000	1000	1860	1860	2480	2480
Torque Out NM	5052-H34 AL	1.02	1.02	1.24	1.24	2.82	5.08	5.08
	Cold Rolled Sheet	1.95	1.95	2.15	2.15	3.90	8.40	8.40

Quote the item code given below with your order/ inquiries:

Dimensions in mm

G Min	Length↓Dia→	M2x0.4	M2.5x0.45	M3x0.5	3.5M3x0.5	M3.5x0.6	M4x0.7	M5x0.8
	3	W20S202003	W20S220503	W20S203003	W20S203103		W20S204003	
	4	W20S202004	W20S220504	W20S203004	W20S203104	W20S230504	W20S204004	
2.40	5	W20S202005	W20S220505	W20S203005	W20S203105	W20S230505	W20S204005	W20S205005
3.20	6	W20S202006	W20S220506	W20S203006	W20S203106	W20S230506	W20S204006	W20S205006
	8	W20S202008	W20S220508	W20S203008	W20S203108	W20S230508	W20S204008	W20S205008
4.00	10	W20S202010	W20S220510	W20S203010	W20S203110	W20S230510	W20S204010	W20S205010
5.00	12	W20S202012	W20S220512	W20S203012	W20S203112	W20S230512	W20S204012	W20S205012
6.50	14	W20S202014	W20S220514	W20S203014	W20S203114	W20S230514	W20S204014	W20S205014
	16	W20S202016	W20S220516	W20S203016	W20S203116	W20S230516	W20S204016	W20S205016
9.50	18			W20S203018	W20S203118	W20S230518	W20S204018	W20S205018
	20			W20S203020	W20S203120	W20S230520	W20S204020	W20S205020
	22			W20S203022	W20S203122	W20S230522	W20S204022	W20S205022
	25			W20S203025	W20S203125	W20S230525	W20S204025	W20S205025
	30			W20S203030	W20S203130	W20S230530	W20S204030	W20S205030
	35			W20S203035	W20S203135	W20S230535	W20S204035	W20S205035
	40			W20S203040	W20S203140	W20S230540	W20S204040	W20S205040

Sizes in BLUE are non-preferred. Availability is limited and MOQ higher.

Length Tolerance +0.05 -0.13

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F