




WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

WBRC2

Rivet body: Copper Alloy

Mandrel: Bronze

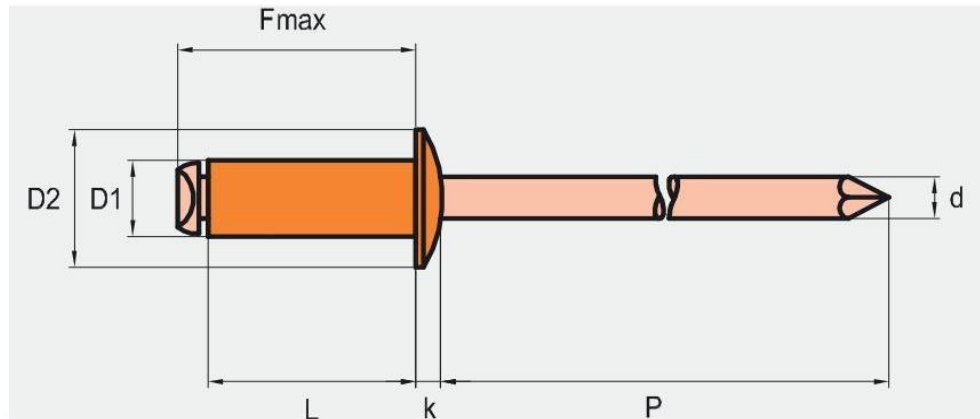

BLIND RIVET DOME HEAD (~DIN EN ISO 15983)

Quote the item code given below with your order/enquiries.

Dimensions in mm

Rivet Size	Hole Size	Shear	Tensile	D1	Rivet Length L	D2	k	d	P
$\emptyset$				Rivet Dia	Tolerance	Head Dia	Hd Thickness	Stem Dia	Stem Length
3.20	3.3 mm	700N	800N	3.2 +/-0.10	+1.0/-0.2	6.5 +/-0.7	+0.8/-0.2	2.00	≥ 27.0
4.00	4.1 mm	1000N	1500N	4.0 +/-0.15	+1.0/-0.2	8.0 +/-1.0	+1.0/-0.3	2.00	≥ 27.0
4.80	4.9 mm	1500N	2000N	4.8 +/-0.15	+1.0/-0.2	9.5 +/-0.3	+1.1/-0.3	2.70	≥ 27.0

		F-Max	Item Code
3.2 x 5.0	0.5 - 2.5	9.9	WBRC230205
3.2 x 6.0	1.5 - 3.5	10.9	WBRC230206
3.2 x 10.0	5.0 - 7.0	14.9	WBRC230210
3.2 x 12.0	7.0 - 9.0	16.9	WBRC230212
4.0 x 6.0	1.0 - 3.0	10.9	WBRC204006
4.0 x 8.0	3.0 - 5.0	12.9	WBRC204008
4.0 x 10.0	5.0 - 6.5	14.9	WBRC204010
4.0 x 12.0	6.5 - 8.5	16.9	WBRC204012

		F-Max	Item Code
4.0 x 14.0	8.5 - 10.5	18.9	WBRC204014
4.0 x 16.0	10.5 - 12.5	20.9	WBRC204016
4.8 x 8.0	1.5 - 3.5	13.4	WBRC240808
4.8 x 10.0	3.5 - 5.5	15.4	WBRC240810
4.8 x 12.0	5.5 - 7.5	17.4	WBRC240812
4.8 x 14.0	7.5 - 9.5	19.4	WBRC240814
4.8 x 16.0	9.5 - 11.5	21.4	WBRC240816

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F