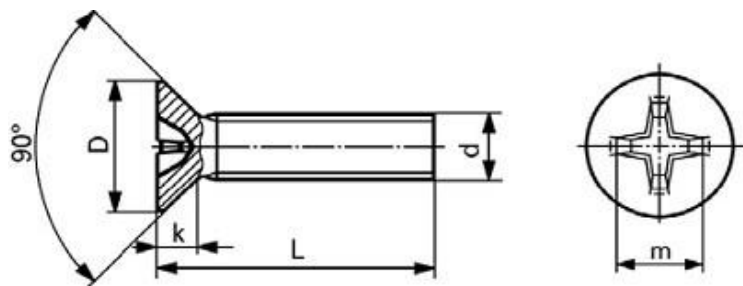


**WITRUS PRIVATE LIMITED**

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

**WKXS2****SS 304****DIN 965 CSK PHILLIPS (H)**

Thread runout as per ISO 3508

Parameter↓ Size→		M1.6x0.35	M2x0.4	M2.5x0.45	M3x0.5	M3.5x0.6
Head Dia D	Max	3.00	3.80	4.70	5.60	6.50
	Min	2.75	3.50	4.40	5.30	6.20
Head Height k	Max	0.96	1.20	1.50	1.65	1.93
Recess dia m nom		1.70	2.35	2.70	2.90	3.90
Slot depth max		0.91	1.25	1.55	1.80	1.90
Drive Bit		PH0	PH1	PH1	PH1	PH2
Length Tolerance		≤3mm ±0.20, 4 - 6mm ±0.24, 7-10mm ±0.29, 11-16mm ±0.35, 20-30mm ±0.42, 35-50mm ±0.50				

Quote the item code given below with your order/ inquiries:

Dimensions in mm

Length↓ Size→	M1.6x0.35	M2x0.4	M2.5x0.45	M3x0.5	M3.5x0.6
2	WKXS210602				
3	WKXS210603	WKXS202003	WKXS220503	WKXS203003	
4	WKXS210604	WKXS202004	WKXS220504	WKXS203004	WKXS230504
5	WKXS210605	WKXS202005	WKXS220505	WKXS203005	WKXS230505
6	WKXS210606	WKXS202006	WKXS220506	WKXS203006	WKXS230506
8	WKXS210608	WKXS202008	WKXS220508	WKXS203008	WKXS230508
10	WKXS210610	WKXS202010	WKXS220510	WKXS203010	WKXS230510
12	WKXS210612	WKXS202012	WKXS220512	WKXS203012	WKXS230512
14	WKXS210614	WKXS202014	WKXS220514	WKXS203014	WKXS230514
16	WKXS210616	WKXS202016	WKXS220516	WKXS203016	WKXS230516
18	WKXS210618	WKXS202018	WKXS220518	WKXS203018	WKXS230518
20	WKXS210620	WKXS202020	WKXS220520	WKXS203020	WKXS230520
22	WKXS210622	WKXS202022	WKXS220522	WKXS203022	WKXS230522
25	WKXS210625	WKXS202025	WKXS220525	WKXS203025	WKXS230525
28		WKXS202028	WKXS220528	WKXS203028	WKXS230528
30		WKXS202030	WKXS220530	WKXS203030	WKXS230530
35		WKXS202035	WKXS220535	WKXS203035	WKXS230535
40		WKXS202040	WKXS220540	WKXS203040	WKXS230540
45		WKXS202045	WKXS220545	WKXS203045	WKXS230545
50		WKXS202050	WKXS220550	WKXS203050	WKXS230550
55				WKXS203055	WKXS230555
60				WKXS203060	WKXS230560
65				WKXS203065	WKXS230565
70				WKXS203070	WKXS230570
75				WKXS203075	WKXS230575
80				WKXS203080	WKXS230580
90				WKXS203090	WKXS230590
100				WKXS203100	

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative.

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F




WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

7019386466

WKXS2
SS 304

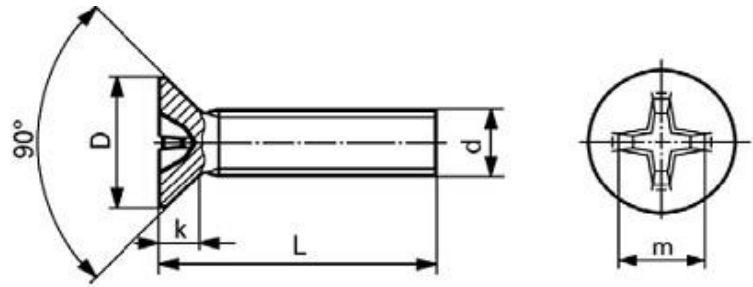

DIN 965 CSK PHILLIPS (H)

Thread runout as per ISO 3508

Parameter↓ Size→		M4x0.7	M5x0.8	M6x1.0	M8x1.25	M10x1.5
Head Dia D	Max	7.50	9.20	11.00	14.50	18.00
	Min	7.14	8.84	10.57	14.07	17.57
Head Height k	Max	2.20	2.50	3.00	4.00	5.00
Recess dia m nom		4.40	4.60	6.60	8.70	9.60
Slot depth max		2.40	2.60	3.30	4.40	5.30
Drive Bit		PH2	PH2	PH3	PH4	PH4
Length Tolerance		≤3mm ±0.20, 4 - 6mm ±0.24, 7-10mm ±0.29, 11-16mm ±0.35, 20-30mm ±0.42, 35-50mm ±0.50				

Quote the item code given below with your order/ inquiries

Dimensions in mm

Length↓ Size→	M4x0.7	M5x0.8	M6x1.0	M8x1.25	M10x1.5
4	WKXS204004				
5	WKXS204005				
6	WKXS204006	WKXS205006			
8	WKXS204008	WKXS205008	WKXS206008		
10	WKXS204010	WKXS205010	WKXS206010	WKXS208010	
12	WKXS204012	WKXS205012	WKXS206012	WKXS208012	
14	WKXS204014	WKXS205014	WKXS206014	WKXS208014	
16	WKXS204016	WKXS205016	WKXS206016	WKXS208016	WKXS210016
18	WKXS204018	WKXS205018	WKXS206018	WKXS208018	WKXS210018
20	WKXS204020	WKXS205020	WKXS206020	WKXS208020	WKXS210020
22	WKXS204022	WKXS205022	WKXS206022	WKXS208022	WKXS210022
25	WKXS204025	WKXS205025	WKXS206025	WKXS208025	WKXS210025
28	WKXS204028	WKXS205028	WKXS206028	WKXS208028	WKXS210028
30	WKXS204030	WKXS205030	WKXS206030	WKXS208030	WKXS210030
35	WKXS204035	WKXS205035	WKXS206035	WKXS208035	WKXS210035
40	WKXS204040	WKXS205040	WKXS206040	WKXS208040	WKXS210040
45	WKXS204045	WKXS205045	WKXS206045	WKXS208045	WKXS210045
50	WKXS204050	WKXS205050	WKXS206050	WKXS208050	WKXS210050
55	WKXS204055	WKXS205055	WKXS206055	WKXS208055	WKXS210055
60	WKXS204060	WKXS205060	WKXS206060	WKXS208060	WKXS210060
65	WKXS204065	WKXS205065	WKXS206065	WKXS208065	WKXS210065
70	WKXS204070	WKXS205070	WKXS206070	WKXS208070	WKXS210070
75	WKXS204075	WKXS205075	WKXS206075	WKXS208075	WKXS210075
80	WKXS204080	WKXS205080	WKXS206080	WKXS208080	WKXS210080
90	WKXS204090	WKXS205090	WKXS206090	WKXS208090	WKXS210090
100	WKXS204100	WKXS205100	WKXS206100	WKXS208100	WKXS210100

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F