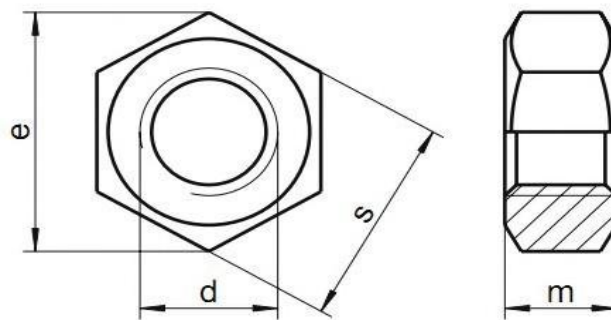


W6uNS4**SS - 316****Hex Nut ASME B 18.2.2 (UNC Series)**

Quote the item code given below with your order/enquiries.

Dimensions in inches

Thread Size	Item Code	Width Across Corners e min	Width Across flat S			Thickness m		
			Nom	Min	Max	Nom	Min	Max
2-56	W6uNS425600	0.205	3/16"	0.180	0.188	1/16"	0.057	0.066
4-40	W6uNS444000	0.275	1/4"	0.241	0.25	3/32"	0.087	0.098
6-32	W6uNS463200	0.344	5/16"	0.302	0.312	7/64"	0.102	0.114
8-32	W6uNS483200	0.378	11/32"	0.332	0.344	1/8"	0.117	0.130
10-24	W6uNS412400	0.413	3/8"	0.362	0.375	1/8"	0.117	0.130
10-24(A)	W6uNS412410	0.413	21/64"	0.320	0.328	5/32"	0.148	0.162
12-24	W6uNS412240	0.482	7/16"	0.423	0.438	5/32"	0.148	0.161
1/4-20	W6uNS462000	0.488	7/16"	0.428	0.438	7/32"	0.212	0.226
5/16-18	W6uNS479000	0.557	1/2"	0.489	0.500	17/64	0.258	0.273
3/8-16	W6uNS491000	0.628	9/16"	0.551	0.563	21/64	0.320	0.337
7/16-14	W6uNS411000	0.768	11/16"	0.675	0.688	3/8"	0.365	0.385
1/2-13	W6uNS413000	0.840	3/4"	0.736	0.750	7/16"	0.427	0.448
9/16-12	W6uNS414000	1.010	7/8"	0.861	0.875	31/64"	0.473	0.496
5/8-11	W6uNS415000	1.051	15/16"	0.922	0.938	36/64"	0.535	0.559
3/4-10	W6uNS419000	1.240	1 1/8"	1.088	1.125	41/64"	0.617	0.665
7/8-9	W6uNS423000	1.447	1 5/16"	1.269	1.312	3/4"	0.724	0.776
1-8	W6uNS425000	1.653	1 1/2"	1.450	1.500	55/64"	0.831	0.888
1 1/8-7	W6uNS428000	1.859	1 11/16"	1.631	1.688	31/32"	0.939	0.999
1 1/4-7	W6uNS431000	2.066	1 7/8"	1.812	1.875	1 1/16"	1.030	1.094
1 1/2-6	W6uNS438000	2.480	2 1/4"	2.175	2.250	1 9/32"	1.245	1.317

Sizes in BROWN are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.**Refer:** ISO 3506-2 Annex F