




WBRLD3


Rivet Body: Aluminium Al-Mg 5.0

Mandrel: Stainless Steel (AISI 304)

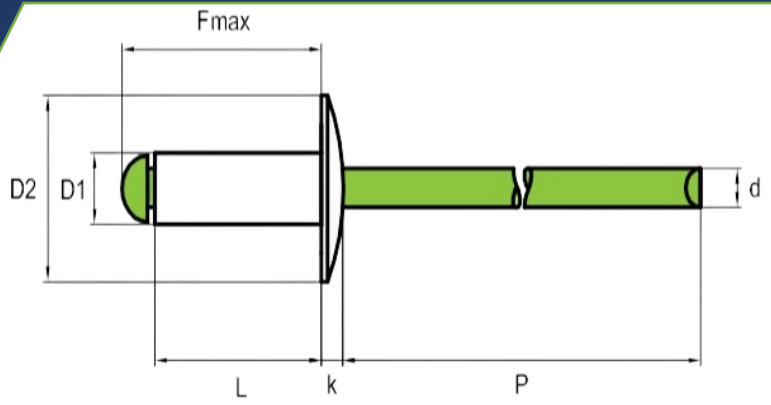

Blind Rivet Large Flange Dome Head

Dimensions in mm

Rivet Dia D1	Hole Size	Head Thickness k	Stem Dia d	Stem Length p	Rivet Length L Tolerance	Shear	Tensile
							
5.0 +0.08/-0.15	5.1 mm	1.8 +/- 0.3	2.70	≥ 27.0	+1.0/-0.2	1650N	2500N

Quote the item code given below with your order/enquiries.

Dimensions in mm

	F-Max		D2 = 11.0 +/- 1.0 Part No	D2 = 14.0 +0.5 /-1.0 Part No
5.0x8.0 mm	13.4 mm	2.0 - 4.5 mm	WBRLD3053008	WBRLD305008
5.0x10.0 mm	15.4 mm	4.5 - 6.5 mm	WBRLD3053010	WBRLD305010
5.0x12.0 mm	17.4 mm	6.0 - 8.0 mm	WBRLD3053012	WBRLD305012
5.0x14.0 mm	19.4 mm	7.5 - 10.0 mm	WBRLD3053014	WBRLD305014
5.0x16.0 mm	21.4 mm	9.5 - 12.0 mm	WBRLD3053016	WBRLD305016
5.0x18.0 mm	23.4 mm	11.5 - 13.5 mm	WBRLD3053018	WBRLD305018
5.0x20.0 mm	25.4 mm	13.0 - 15.5 mm	WBRLD3053020	WBRLD305020
5.0x25.0 mm	30.4 mm	15.0 - 20.5 mm	WBRLD3053025	WBRLD305025
5.0x30.0 mm	35.4 mm	20.0 - 25.0 mm	WBRLD3053030	WBRLD305030

Sizes in BROWN are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F