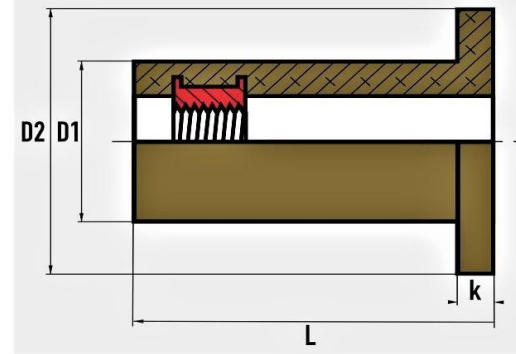




WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091





W2NCNe EPDM With Brass Insert

BLIND RIVET NUT Open Type (Neopren (Rubber Nut)(Well Nut))

Quote the item code given below with your order/enquiries.

Dimensions in mm

Thread Size	Part No	Grip Range	Hole Size max	D1 Body Dia	Body Length L	Collar Dia	k Collar Thickness	Hardnes s HsA
								
M3x0.5	W2NCNe03001	0.4-4.0	8.3	7.90	12.6	11.0	1.2	60
M4x0.7	W2NCNe04001	0.4-4.0	8.3	7.90	12.6	11.0	1.2	70
M5x0.8	W2NCNe05001	0.4-4.9	9.9	9.60	14.1	12.7	0.9	60
	W2NCNe05002	4.0-10.0			21.5	14.0		
	W2NCNe05003	7.9-15.0			26.5	14.0	1.3	
	W2NCNe05004	20.5-30.0			39.0	14.0		
M6x1.0	W2NCNe06001	0.4-4.0	13.0	12.70	16.0	16.0	1.3	60
	W2NCNe06002	0.8-4.7			21.1	19.0	4.7	70
	W2NCNe06003	6.4-11.5			26.7	16.0	2	70
	W2NCNe06004	11.5-23.0	13.3	13.00	35.0	16.0	1.3	60
	W2NCNe06005	26.0-38.0	13.0	12.70	50.0	16.0	3.2	60
M8x1.25	W2NCNe08001	0.4-4.0	16.2	15.90	18.3	21.5	3.2	60
	W2NCNe08002	3.9-9.5			27.9	21.5	5.7	
	W2NCNe08003	2.0-18.0	18.3	18.00	30.0	20.5	2	
	W2NCNe08004	15.0-35.0			50.0	20.0	1.6	
M10x1.25	W2NCNe10001	19.0-38.0	20.3	20.00	55.0	22.5	1.3	60
M12x1.75	W2NCNe12001	38.0-56.0	24.3	24.00	78.0	27.0	1.3	60

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F