




WITRUS PRIVATE LIMITED


#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

W2Nu1M

MS - ZN

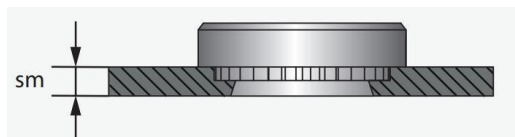

UNIFIED SERIES FINE (UNF)



SELF CLINCH NUT S (For Sheet Hardness Upto HRB 70)

Size→ Dimension↓		#10-32	1/4"-28	5/16"-24	3/8"-24
Collar dia d2	max	0.249	0.343	0.412	0.499
Nut dia d3	±0.01	0.340	0.440	0.500	0.560
Nut thickness m	±0.01	0.90	0.17	0.23	0.27
Hole Size in Sheet	+0.003	0.250	0.344	0.413	0.500
Minimum edge distance to hole centre		0.28	0.34	0.38	0.44

Quote the item code given below with your order/ inquiries:

Dimensions in mm

Parameter→ Size↓	Shank Code	Item Code	Min Sheet Thickness sm	h (Shank) Max.	Press In (Installation) lbs.		Push out lbs		Torque out lb	
					Aluminium	Steel	Aluminium	Steel	Aluminium	Steel
#10-32	0	W2Nu1M13200	0.030	0.030	2500-3500	4000-6000	68	120	26	32
	1	W2Nu1M13201	0.040	0.038			110	180	32	40
	2	W2Nu1M13202	0.056	0.054			190	320	50	60
1/4"-28	1	W2Nu1M62001	0.054	0.056	4000-7000	6000-8000	360	400	90	150
	2	W2Nu1M62002	0.087	0.090					125	
5/16"-24	1	W2Nu1M79001	0.054	0.056	4000-7000	6000-8000	380	420	160	180
	2	W2Nu1M79002	0.087	0.090					160	
3/8"-24	1	W2Nu1M91001	0.087	0.090	5000-8000	7000-10000	400	460	270	320
	2	W2Nu1M91002	0.120	0.125					270	

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F