




WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

WSDP4M Steel Zinc Plated

DIN 7504 SQ PAN Square

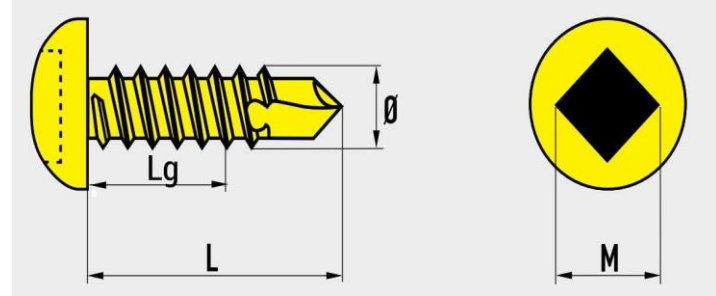

Thread Size	ISO Size	Head Dia	Head thickness	Square M	Drill depth max	Drill speed RPM
ST4.2	#8	8.20	3.05	H-2	max. 3.0 mm	1800-2500
ST4.8	#10	9.50	3.55	H-2	max. 4.4 mm	1800-2500

Other Dimensions as per ISO-7049(DIN - 7981):

Dimensions in mm

	ISO Size x length	Thread length Lg min	Part No		ISO Size x length	Thread length Lg min	Part No
4.2 x 13 mm	#8 x 13 mm	4.3 mm	WSDP4M08013G	4.8 x 50 mm	#10 x 50 mm	39.5 mm	WSDP4M10050G
4.2 x 16 mm	#8 x 16 mm	7.3 mm	WSDP4M08016G	5.5 x 19 mm	#12 x 19 mm	8.0 mm	WSDP4M12019G
4.2 x 19 mm	#8 x 19 mm	10.3 mm	WSDP4M08019G	5.5 x 25 mm	#12 x 25 mm	14.0 mm	WSDP4M12025G
4.2 x 25 mm	#8 x 25 mm	16.3 mm	WSDP4M08025G	5.5 x 32 mm	#12 x 32 mm	21.0 mm	WSDP4M12032G
4.2 x 32 mm	#8 x 32 mm	23.0 mm	WSDP4M08032G	5.5 x 38 mm	#12 x 38 mm	27.0 mm	WSDP4M12038G
4.8 x 13 mm	#10 x 13 mm	3.7 mm	WSDP4M10013G	5.5 x 45 mm	#12 x 45 mm	34.0 mm	WSDP4M12045G
4.8 x 16 mm	#10 x 16 mm	5.8 mm	WSDP4M10016G	5.5 x 50 mm	#12 x 50 mm	39.0 mm	WSDP4M12050G
4.8 x 19 mm	#10 x 19 mm	8.7 mm	WSDP4M10019G	6.3 x 19 mm	#14 x 19 mm	7.0 mm	WSDP4M14019G
4.8 x 22 mm	#10 x 22 mm	11.7 mm	WSDP4M10022G	6.3 x 25 mm	#14 x 25 mm	13.0 mm	WSDP4M14025G
4.8 x 25 mm	#10 x 25 mm	14.7 mm	WSDP4M10025G	6.3 x 32 mm	#14 x 32 mm	20.0 mm	WSDP4M14032G
4.8 x 32 mm	#10 x 32 mm	21.5 mm	WSDP4M10032G	6.3 x 38 mm	#14 x 38 mm	26.0 mm	WSDP4M14038G
4.8 x 38 mm	#10 x 38 mm	27.5 mm	WSDP4M10038G	6.3 x 45 mm	#14 x 45 mm	33.0 mm	WSDP4M14045G
4.8 x 45 mm	#10 x 45 mm	34.5 mm	WSDP4M10045G	6.3 x 50 mm	#14 x 50 mm	38.0 mm	WSDP4M14050G

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative.

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F