




WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

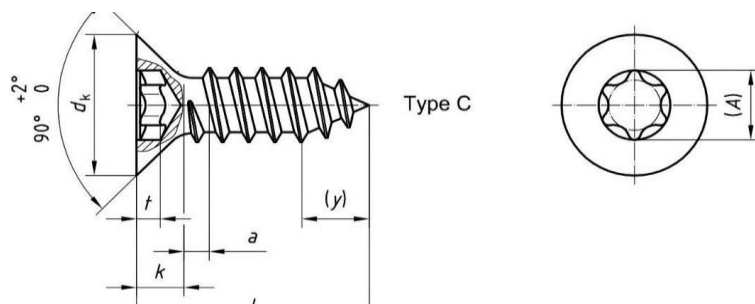

W1TKS4 AISI 316

ISO 14585C SELF TAPPING CSK TORX

DIA d (Size)	ST2.2	ST2.9	ST3.5	ST(3.9)	ST4.2	ST4.8	ST5.5	ST6.3
ISO Size	#2	#4	#6	(#7)	#8	#10	#12	#14
Pitch a	0.80	1.10	1.30	1.40	1.40	1.60	1.80	1.80
TPI	32.00	24.00	20.00	19.00	18.00	16.00	14.00	14.00
Head dia dk max	4.30	5.50	7.30	7.85	8.40	9.30	10.30	11.30
Head dia dk min	4.00	5.20	6.90	7.45	8.00	8.90	9.90	10.90
k max	1.30	1.70	2.35	2.45	2.60	2.80	3.00	3.15
Incomplete thrd y	2.20	2.60	3.20	3.50	3.70	4.30	5.00	6.00
Drive Torx	T6	T10	T15	T15	T20	T25	T25	T30
Drive Dia A	2.40	2.80	3.35	3.35	3.95	4.50	4.50	5.60
Socket depth t	1.10	1.27	1.40	1.40	1.80	2.03	2.03	2.42

Quote the item code given below with your order/enquiries.

Dimensions in mm

DIA d (Size)	ST2.2	ST2.9	ST3.5	ST(3.9)	ST4.2	ST4.8	ST5.5	ST6.3
Length ↓ ISO Size →	#2	#4	#6	(#7)	#8	#10	#12	#14
4.5 (3/16")	W1TKS402405							
6.5 (1/4")	W1TKS402605	W1TKS404605	W1TKS406605					
9.5 (3/8")	W1TKS402905	W1TKS404905	W1TKS406905	W1TKS407905	W1TKS408905	W1TKS410905		
13 (1/2")	W1TKS402013	W1TKS404013	W1TKS406013	W1TKS407013	W1TKS408013	W1TKS410013	W1TKS412013	W1TKS414013
16 (5/8")	W1TKS402016	W1TKS404016	W1TKS406016	W1TKS407016	W1TKS408016	W1TKS410016	W1TKS412016	W1TKS414016
19 (3/4")	W1TKS402019	W1TKS404019	W1TKS406019	W1TKS407019	W1TKS408019	W1TKS410019	W1TKS412019	W1TKS414019
22 (7/8")	W1TKS402022	W1TKS404022	W1TKS406022	W1TKS407022	W1TKS408022	B4B4110022	W1TKS412022	W1TKS414022
25 (1")	W1TKS402025	W1TKS404025	W1TKS406025	W1TKS407025	W1TKS408025	W1TKS410025	W1TKS412025	W1TKS414025
32 (1-1/4")	W1TKS402032	W1TKS404032	W1TKS406032	W1TKS407032	W1TKS408032	W1TKS410032	W1TKS412032	W1TKS414032
38 (1-1/2")	W1TKS402038	W1TKS404038	W1TKS406038	W1TKS407038	W1TKS408038	W1TKS410038	W1TKS412038	W1TKS414038
45 (1-3/4")			W1TKS406045	W1TKS407045	W1TKS408045	W1TKS410045	W1TKS412045	W1TKS414045
50 (2")			W1TKS406050	W1TKS407050	W1TKS408050	W1TKS410050	W1TKS412050	W1TKS414050
60 (2-1/2")			W1TKS406060		W1TKS408060	W1TKS410060	W1TKS412060	W1TKS414060
70 (2-3/4")			W1TKS406070		W1TKS408070	W1TKS410070	W1TKS412070	W1TKS414070
80 (3-1/4")					W1TKS408080	W1TKS410080	W1TKS412080	W1TKS414080
90 (3-1/2")					W1TKS408090	W1TKS410090	W1TKS412090	W1TKS414090
100 (4")					W1TKS408100	W1TKS410100	W1TKS412100	W1TKS414100
110 (4-1/2")						W1TKS410110	W1TKS412110	W1TKS414110
120 (4-3/4")						W1TKS410120	W1TKS412120	W1TKS414120
130 (5-1/4")							W1TKS412130	W1TKS414130
140 (5-1/2")							W1TKS412140	W1TKS414140
150 (6")							W1TKS412150	W1TKS414150

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F