




WITRUS PRIVATE LIMITED

#06 Andrahalli Main Road Peenya 2nd Stage Vishwaneedam Post
Bangalore - 560091

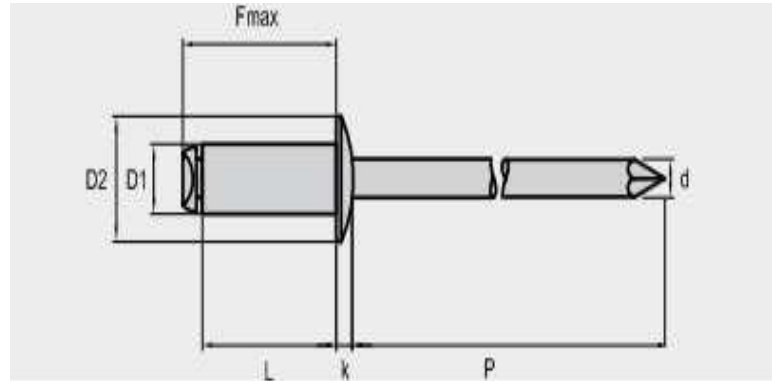

WBRA2

Rivet body: Aluminium Al-Mg 2.5/Al-Mg 3.5

Mandrel: Aluminium Al-Mg 2.5/Al-Mg 3.5

BLIND RIVET DOME HEAD (~DIN EN ISO 15981)

Quote the item code given below with your order/enquiries.

Dimensions in mm

Rivet Size	Hole Size	Shear	Tensile	D1	L [Rivet Length]	D2	k	d	P
Ø				Rivet Dia	Tolerance	Head Dia	Hd Thickness	Stem Dia	Stem Length
3.2 Al.Mg2.5	3.3 mm	535N	670N	3.2 +0.08/-0.1	+1.0/-0.2	6.5 + 0 /-0.7	0.8 +/-0.15	1.95	≥ 27.0
4.0 Al.Mg3.5	4.1 mm	845N	1025N	4.0 + 0.08/-0.15	+1.0/-0.2	8.0 + 0 /-1.0	1.0 +/-0.3	2.45	≥ 27.0
4.8 Al.Mg3.5	4.9 mm	1150N	1420N	4.8 + 0.08/-0.15	+1.0/-0.2	9.5 + 0 /-1.0	1.1 +/-0.3	2.90	≥ 27.0

D1	F-Max		Part No
3.2 x 6.0 mm	10.9 mm	1.5-3.5 mm	WBRA230206
3.2 x 8.0 mm	12.9 mm	3.5-5.0 mm	WBRA230208
3.2 x 10.0 mm	14.9 mm	5.0-7.0 mm	E6D3330210
3.2 x 12.0 mm	16.9 mm	7.0-8.5 mm	WBRA230212
3.2 x 14.0 mm	18.9 mm	8.5-10.5 mm	WBRA230214
3.2 x 16.0 mm	20.9 mm	10.5-13.0 mm	WBRA230216
4.0 x 6.0 mm	10.9 mm	1.5-3.5 mm	WBRA240406
4.0 x 8.0 mm	12.9 mm	3.5-5.0 mm	WBRA240408
4.0 x 10.0 mm	14.9 mm	5.0-6.5 mm	WBRA240410
4.0 x 12.0 mm	16.9 mm	6.5-8.5 mm	WBRA240412
4.0 x 14.0 mm	18.9 mm	8.5-10.5 mm	WBRA240414
4.0 x 16.0 mm	20.9 mm	10.5-12.5 mm	WBRA240416

D1	Part No		F-Max
4.0 x 18.0 mm	WBRA240418	12.5-14.5 mm	22.9 mm
4.0 x 20.0 mm	WBRA240420	14.5-16.5 mm	24.9 mm
4.8 x 8.0 mm	WBRA240808	3.0-4.5 mm	13.4 mm
4.8 x 10.0 mm	WBRA240810	4.5-6.0 mm	15.4 mm
4.8 x 12.0 mm	WBRA240812	6.0-7.5 mm	17.4 mm
4.8 x 14.0 mm	WBRA240814	7.5-9.0 mm	19.4 mm
4.8 x 16.0 mm	WBRA240816	9.0- 11.5 mm	21.4 mm
4.8 x 18.0 mm	WBRA240818	11.5-13.0 mm	23.4 mm
4.8 x 20.0 mm	WBRA240820	13.0-15.0 mm	25.4 mm
4.8 x 25.0 mm	WBRA240825	15.0-20.0 mm	27.4 mm
4.8 x 30.0 mm	WBRA240830	20.0-25.0 mm	30.4 mm

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F